
ROHS COMPLIANT

PRODUCT DATA DRAWING

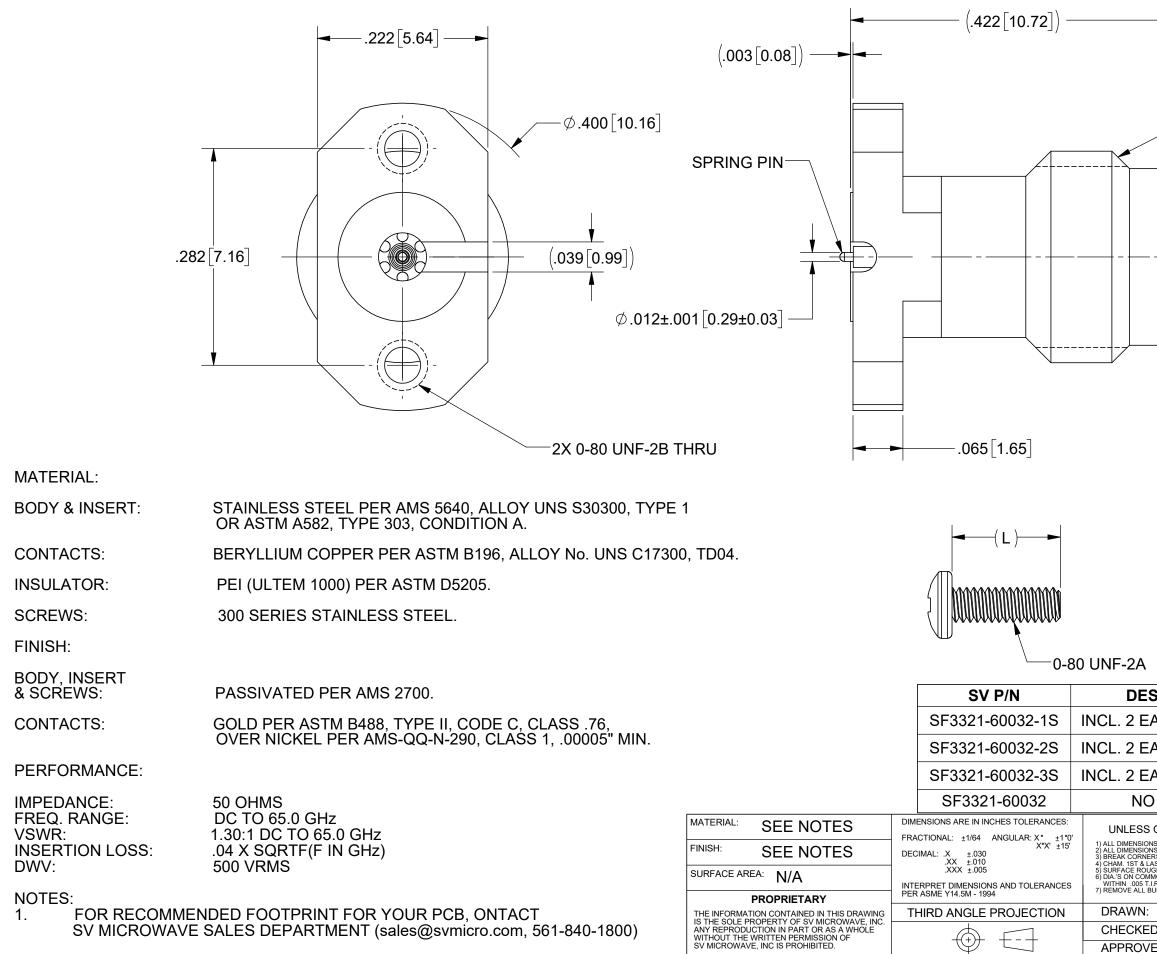

		REVISION HISTORY		1
	REV	DESCRIPTION	DATE	APPROVED
	-	NRN 45350	11/20	BNK
1				
	L			
	-M7 X	.75-6g		
		\frown		
		\bigwedge		
		K/9/	\succ	
			$\overline{}$	
				\geq
		A L		\sim
				·
			\mathcal{A} (l	
			- A	I A
SCRIPTION		PCB THICKNESS	((L)
A (.188) SCREWS		.016 TO .123	.188	

A (.188) SCREWS .016 TO .123 .188				
A (.250) SCREWS .078 TO .185 .250				
A (.438) SCREWS .266 TO .373 .438				
D SCREWS .005 TO .373 N/A				
COTHERWISE SPECIFIED NS ARE IN INCHES (MILLIMETERS) NS ARE AFTER PLATING. RS & EDGES 0.005 R. MAX. AST THREADS. MON CENTERS TO BE CONCENTRIC I.R. SURFACE MOUNT PCB CONNEC	TITLE: 1.85mm FEMALE LITE-TOUCH SURFACE MOUNT PCB CONNECTOR			
	FOR CPW/MICROSTRIP			
D: BNK 11/16/20 B SIZE B SK SF3321-60032-X	S			
ED: BNK 11/16/20 SCALE: 8:1 SHEET	1 OF 1			