
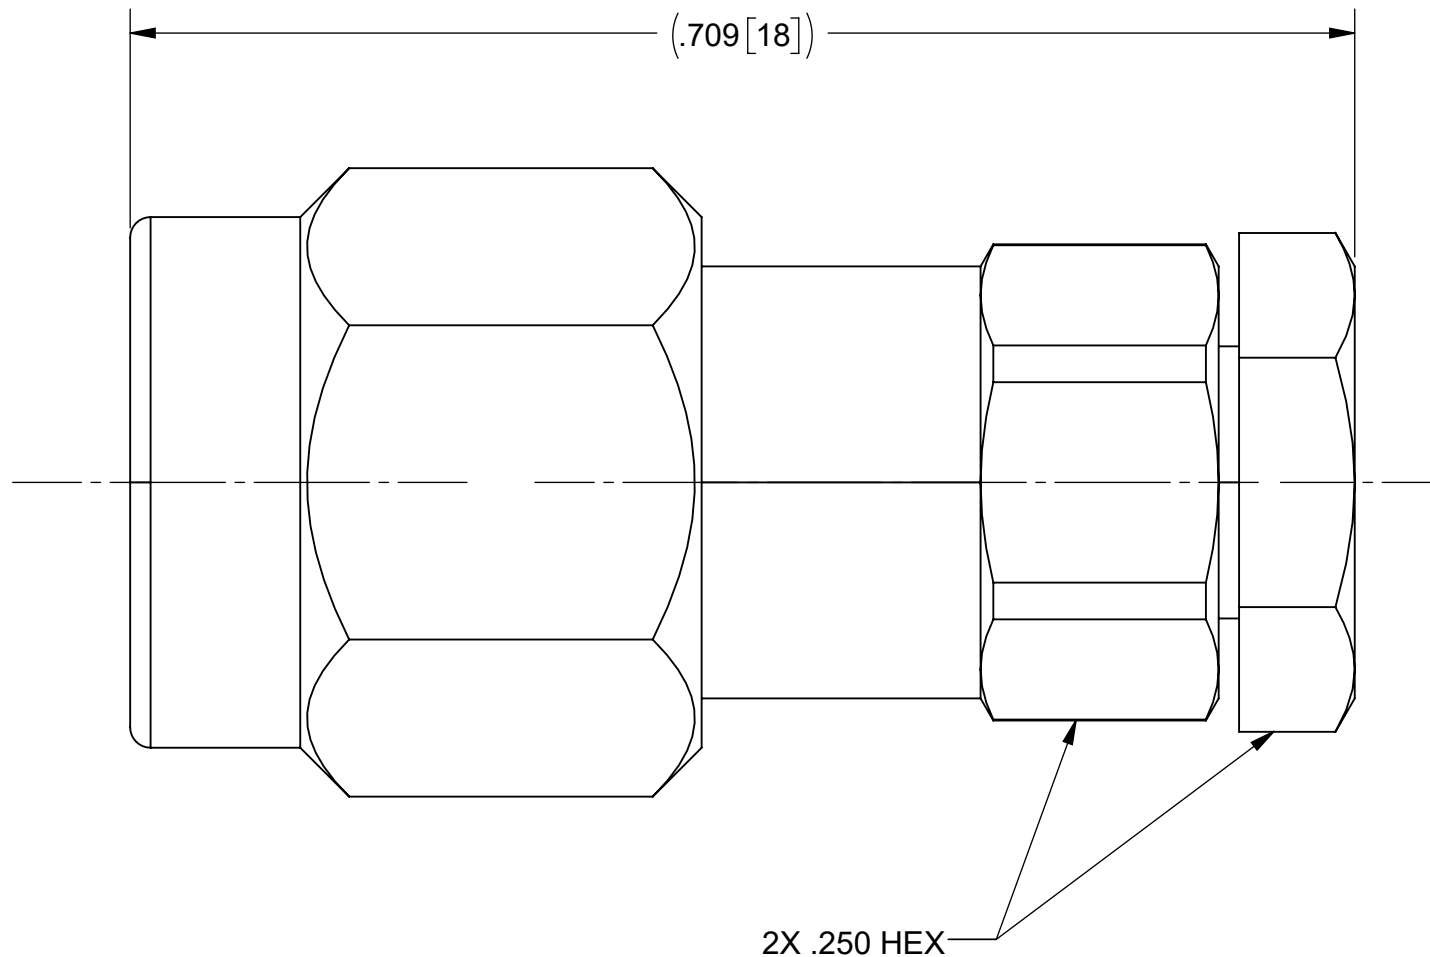
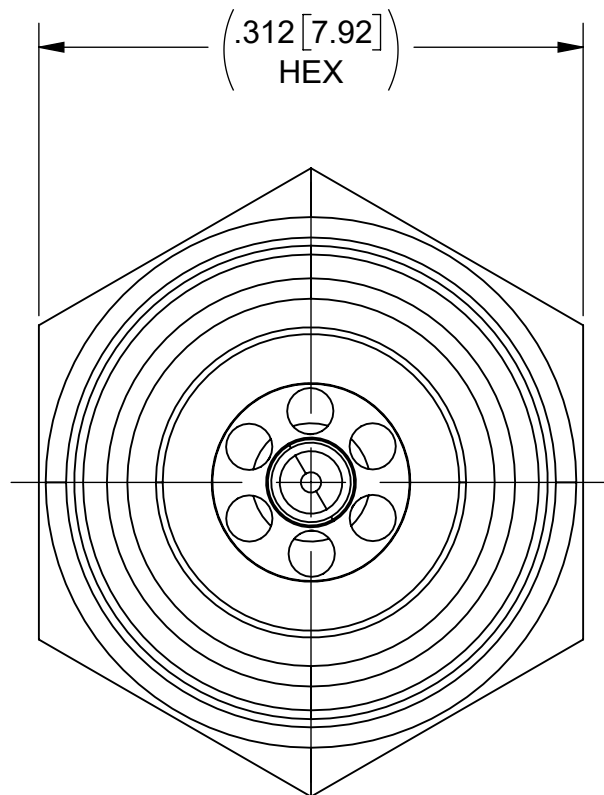


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	NRN 46738	04/22	SEE PDM

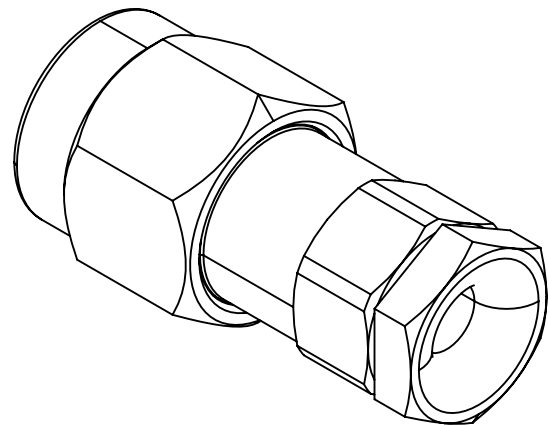

MATERIAL	
BODY, COUPLING NUT, CLAMP NUT, INSERT	ALUMINUM
CONTACT, LOCK RING	BERYLLIUM COPPER
FERRULE	BRASS
INSULATOR	ULTEM 1000

FINISH	
BODY, COUPLING NUT, CLAMP NUT, CONTACT, INSERT, FERRULE	GOLD OVER NICKEL

PERFORMANCE	
IMPEDANCE	50 OHMS
FREQ. RANGE	DC TO 40.0 GHZ

MATERIAL: SEE NOTES
 FINISH: SEE NOTES
 SURFACE AREA: N/A
PROPRIETARY
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:
 FRACTIONAL: ±1/64 ANGULAR: X° ±1'0" X*X' ±15'
 DECIMAL: X ±.030
 .XX ±.010
 .XXX ±.005
 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

UNLESS OTHERWISE SPECIFIED
 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)
 2) ALL DIMENSIONS ARE AFTER PLATING.
 3) BREAK CORNERS & EDGES .005 R. MAX.
 4) CHAM. 1ST & LAST THREADS.
 5) SURFACE ROUGHNESS 63-MIL-STD-10.
 6) DIA: 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN T.I.R.
 7) REMOVE ALL BURRS


THIRD ANGLE PROJECTION

SV MICROWAVE Amphenol
 www.svmicrowave.com

TITLE: STR. M 2.92mm FOR STD FLEXTRA CABLE

SIZE DWG. NO. **B** 1511-80001

SCALE: 9:1 SHEET 1 OF 1



DRAWN: JPM 04/27/2022
 CHECKED: SEE PDM
 APPROVED: SEE PDM