
PRODUCT DATA DRAWING

REV	DESCRIPTION	DATE	APPROVED
Α	DCN 52756	07/23	
			SEE PDM

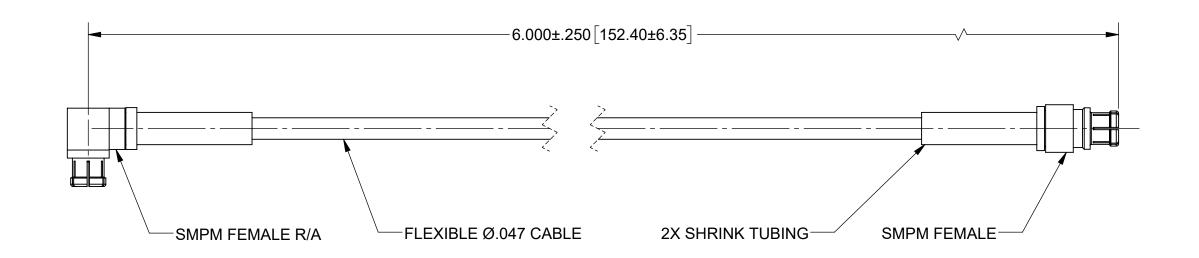

COMPONENTS:

CONNECTORS: SMPM FEMALE R/A (3222-40006)

SMPM FEMALE (3221-40007)

FLEXIBLE Ø.047 CABLE (200-70-479) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 40.0 GHz.

MATERIAL:	SEE NOTES
FINISH:	SEE NOTES
SURFACE AF	rea: N/A
	PROPRIETARY
IS THE SOLE I ANY REPROD WITHOUT THE	ATION CONTAINED IN THIS DRAWI PROPERTY OF SV MICROWAVE, IN UCTION IN PART OR AS A WHOLE E WRITTEN PERMISSION OF VE. INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010
.XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	6) DIA'S ON COMMON CE WITHIN .005 T.I.R. 7) REMOVE ALL BURRS
THIRD ANGLE PROJECTION	DRAWN:
	CHECKED:

UNLESS

APPROVED:

OTHERWISE SPECIFIED IS ARE IN INCHES [MILLIMETERS] IS ARE AFTER PLATING. RS & EDGES .005 R. MAX.	MICROWAVE www.symicrowave.com
AST THREADS. GHNESS 63∝MIL-STD-10. MON CENTERS TO BE CONCENTRIC R	TITLE: SMPM FEMALE R/A TO SM

KRR 05/10/23

SEE PDM

SEE PDM

FEMALE 6" CABLE ASSEMBLY FOR Ø.047 CABLE

SIZE DWG. NO.		7032-9	7032-9731	
SCALE: 4:1			SHEET 1.0	