
PRODUCT DATA DRAWING

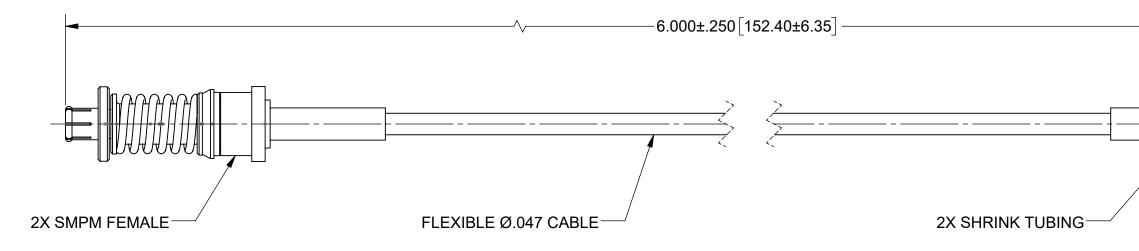

COMPONENTS:

CONNECTORS 2X SMPM FEMALE VITA 67.3 (3221-40071)

CABLE: FLEXIBLE Ø.047 CABLE (200-70-479)

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE:	5
FREQ. RANGE:	[

50 OHMS DC TO 40.0 GHz.

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'	UNLESS (1) ALL DIMENSIONS 2) ALL DIMENSIONS
SURFACE AREA: N/A PROPRIETARY	DECIMAL: X ±.030 .XX ±.010 .XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	3) BREAK CORNER 4) CHAM. 1ST & LAS 5) SURFACE ROUG 6) DIA.'S ON COMM WITHIN .005 T.I.F 7) REMOVE ALL BU
THE INFORMATION CONTAINED IN THIS DRAWING	THIRD ANGLE PROJECTION	DRAWN:
IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF		CHECKED
SV MICROWAVE, INC IS PROHIBITED.		APPROVE

	REVISION HISTORY				
	REV A	DESCRIPTION DCN 52757	DATE 07/23	APPROVED	
		DON 32131	01/23	SEE PDM	
			-		
	Г		ו ו		
		<u>╷</u> _ _ <u></u><u></u>			
	Ч		_		
)		
/					

OTHERWISE SPECIFIED S ARE IN INCHES [MILLIMETERS] S ARE AFTER PLATING. IS & EDGES. 005 R. MAX. ST THREADS. HINESS 63.MIL-STD-10. ION CENTERS TO BE CONCENTRIC RRS		MICROWAVE www.svmicrowave.com			
		SMPM FEMALE VITA 67.3 TO SMPM FEMALE VITA 67.3 6" CABLE			
	KRR 05/09/23			<u>1BLY FOR Ø.047 (</u>	CABLE
D:	SEE PDM	SIZE B	DWG. NO.	7032-	9735
ED:	SEE PDM	S	CALE: 4:1		SHEET 1 OF 1