

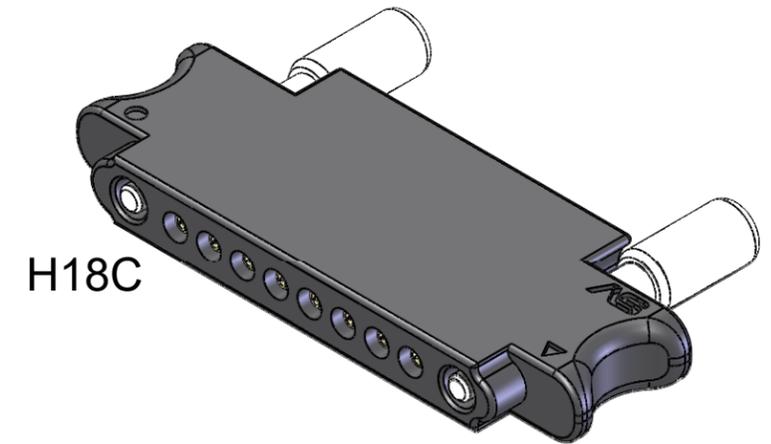
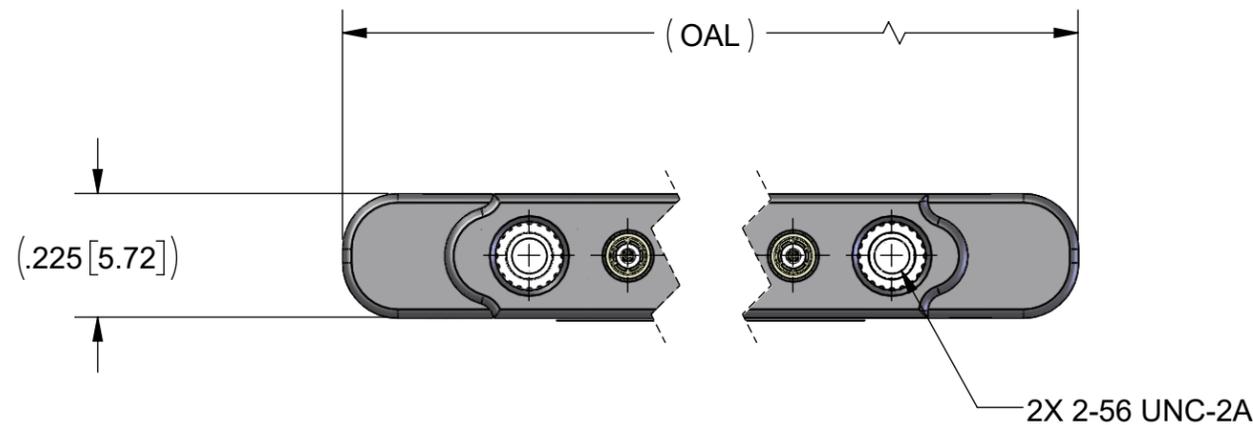


# PRODUCT DATA DRAWING


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 53229	10/23	SEE PDM

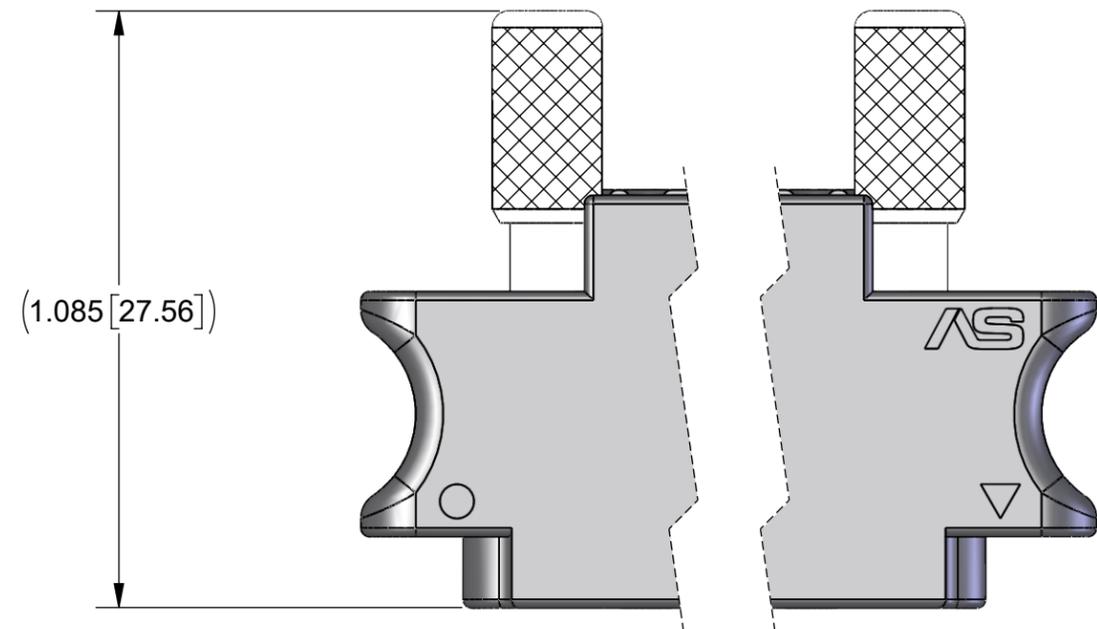

H18C

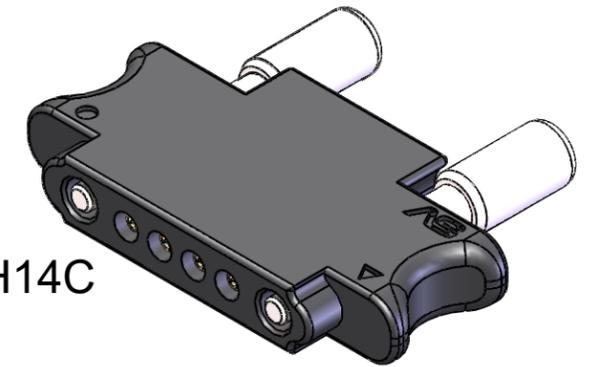

H14C

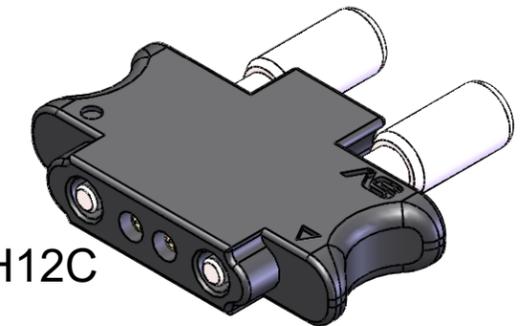

H12C

**MATERIAL:**

HOUSINGS: BLACK CARBON REINFORCED LCP

THUMBSCREWS & INSERTS: STAINLESS STEEL

SMPS CONTACT: 3821-40051


**FINISH:**

THUMBSCREWS & INSERTS: PASSIVATED

**NOTES:**

1. PORT CENTER TO CENTER SPACING: .130
2. NOTE TRIANGLE AND CIRCLE DENOTE KEYING ORIENTATION AND WILL MATCH TO MATING PARTS H1X(P/E/S).

HUMBOLDT PN	PORTS	OAL
H12C	2	1.170
H14C	4	1.430
H18C	8	1.950

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1'0" X°X' ±15'	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	 <p>Amphenol <b>SV MICROWAVE</b> www.svmicrowave.com</p>
FINISH: SEE NOTES	DECIMAL: X ±.030 .XX ±.010 .XXX ±.005	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	
SURFACE AREA: N/A	THIRD ANGLE PROJECTION	DRAWN: DAL 10/27/23	TITLE: HUMBOLDT STANDARD CABLE CONNECTOR MULTIPORT
<p><b>PROPRIETARY</b></p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.</p>		CHECKED: SEE PDM	SIZE DWG. NO. H1XC
		APPROVED: SEE PDM	SCALE: 3:1 SHEET 1 OF 1