

## PRODUCT DATA DRAWING



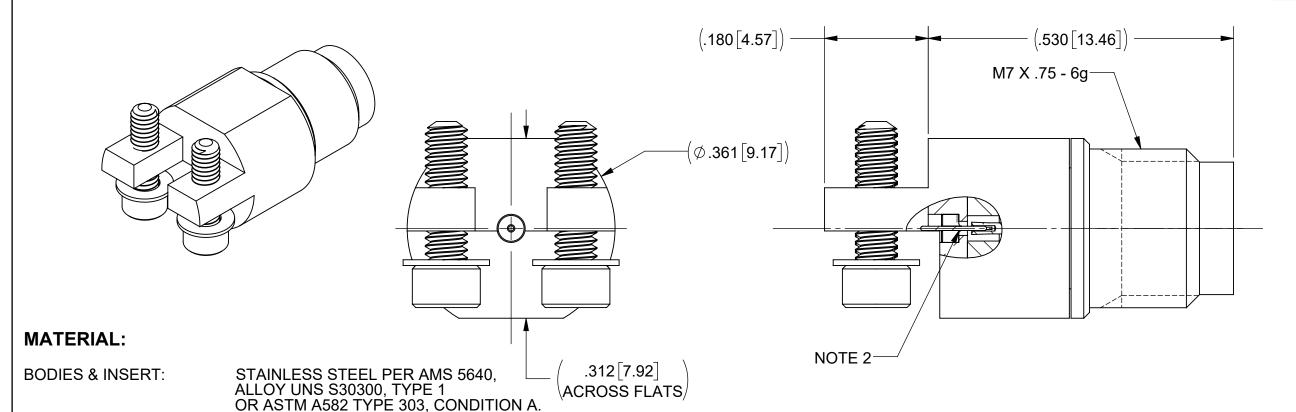

CONTACT: BERYLLIUM COPPER PER ASTM B196,

ALLOY No. UNS C17300, TD04.

PIN: **KOVAR PER ASTM-F15** 

GLASS: **CORNING 7070** 

BEAD: **ULTEM 1000** 

SCREWS AND WASHERS: 18-8 STAINLESS STEEL

FINISH:

**BODIES, CONTACT** 

& PIN: GOLD PER ASTM B488, TYPE II,

CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

INSERT: PASSIVATED PER AMS 2700

**PERFORMANCE:** 


**IMPEDANCE:** 50 OHMS

DC TO 50.0 GHz. FREQ. RANGE:

NOTES:

MOUNTING SCREWS INTENDED FOR USE AS A SOLDER REFLOW FIXTURING AID.

UNIQUE 2-PART ASSEMBLY MECHANICALLY CAPTIVATES THE SOLDERED PIN AND ISOLATES IT FROM ANY MOVEMENT THAT THE INTERFACE CONTACT MAY SEE DURING MATING, PROTECTING THE PCB TRACE FROM DAMAGE

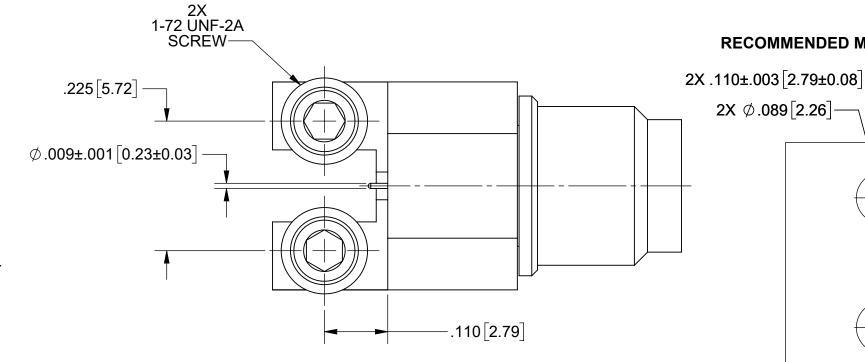

## 2X Ø.089 [2.26]-.225 5.72

RECOMMENDED MOUNTING PATTERN

MATERIAL SEE NOTES FINISH: SEE NOTES

SURFACE AREA: N/A

## **PROPRIETARY**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'

.XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION

## UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63. MIL-STD-10.
6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

2.4mm F TRACEGUARD EDGE
LAUNCH CONNECTOR

MICROWAVE

1621-60092 В

DRAWN: ENB 05/13/24 CHECKED: SEE PDM APPROVED: SEE PDM

SCALE: 6:1 SHEET 1 OF