
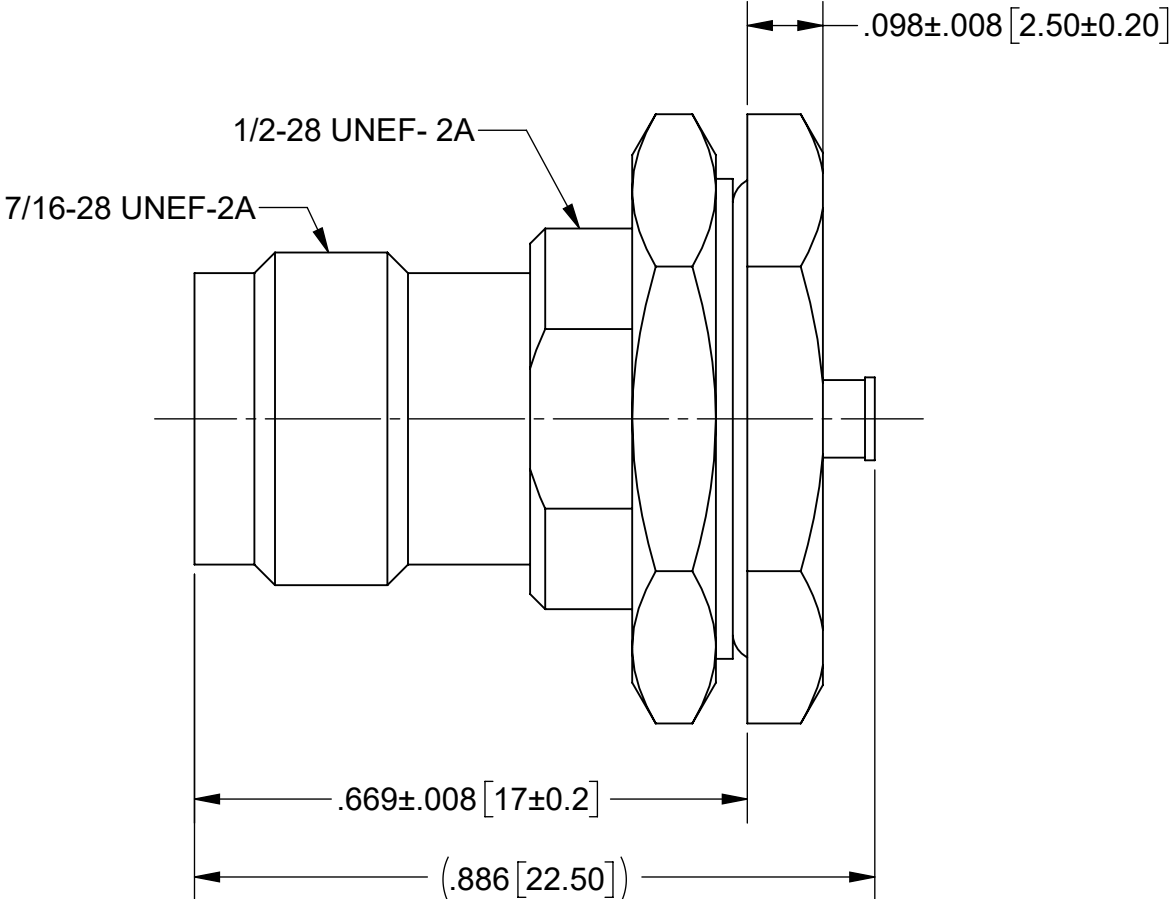




ROHS COMPLIANT

PRODUCT DATA DRAWING


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 41023	01/15	STW
A	DCN 49888	06/20	STW

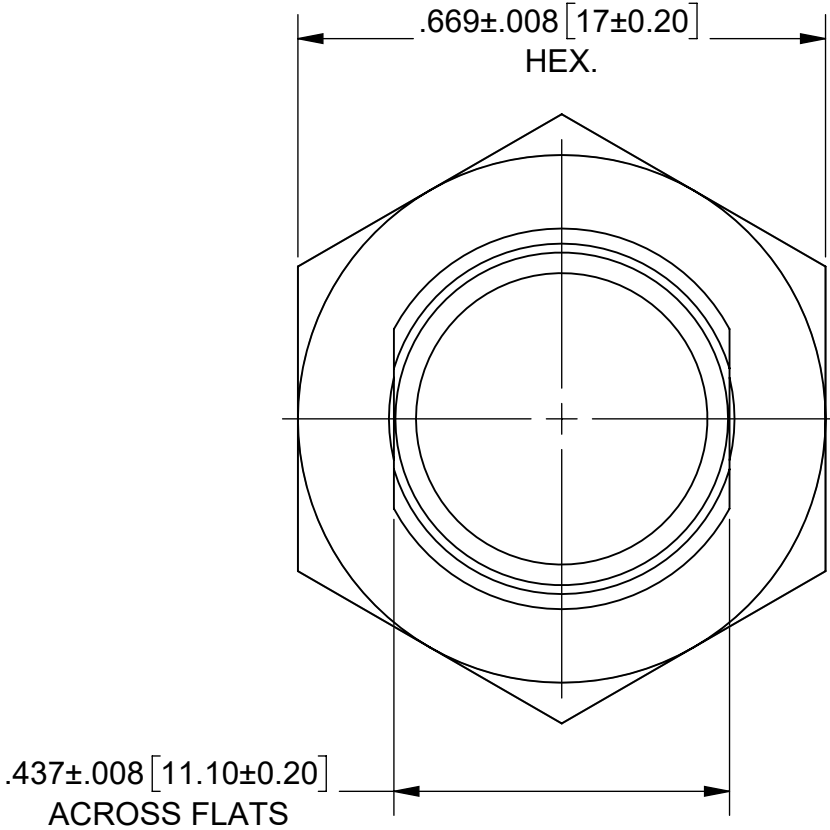

CABLE ASSEMBLY

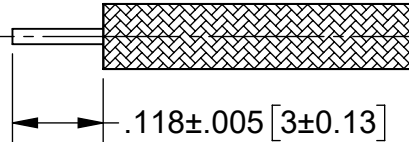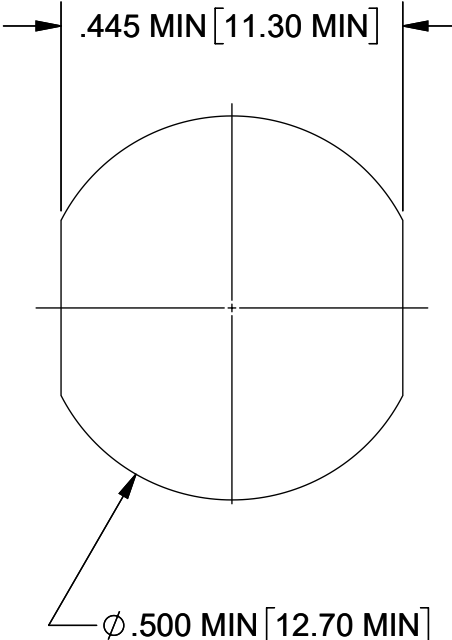

CABLE STRIP

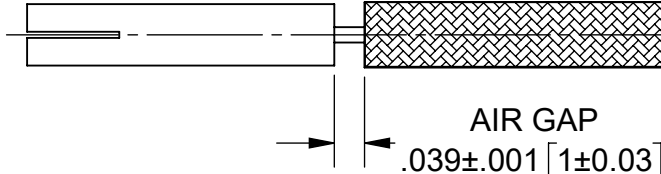

SOLDER

AIR GAP

$$.039 \pm .001 \left[1 \pm 0.03 \right]$$

MATERIAL:

BODY: BRASS

CONTACT: BERYLLIUM COPPER

INSULATOR: PTFE

FINISH:

BODY: TERNARY-ALLOY

CONTACT: GOLD

PERFORMANCE:

OPERATING TEMP.: -45°C TO +120°C

RECOMMENDED MOUNTING HOLE

MATERIAL:	SEE NOTES		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: $X^\circ \pm 1^\circ 0'$ $X^\circ X' \pm 15'$ DECIMAL: $.X \pm .030$ $.XX \pm .010$ $.XXX \pm .005$ INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994		UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-.MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS		 www.svmicrowave.com	
FINISH:	SEE NOTES						TITLE: TNC JACK BULKHEAD FOR $\phi .085$ (SOLDER)	
SURFACE AREA:	N/A						SIZE B DWG. NO. 4021-00064	
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.	THIRD ANGLE PROJECTION 		DRAWN: MAL 01/07/15 CHECKED: STW 01/07/15 APPROVED: STW 01/07/15		SCALE: 4:1		SHEET 1 OF 1	