
ROHS COMPLIANT

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 38042	3/11	STW
Α	REV. DCN 49339	09/18/19	STW



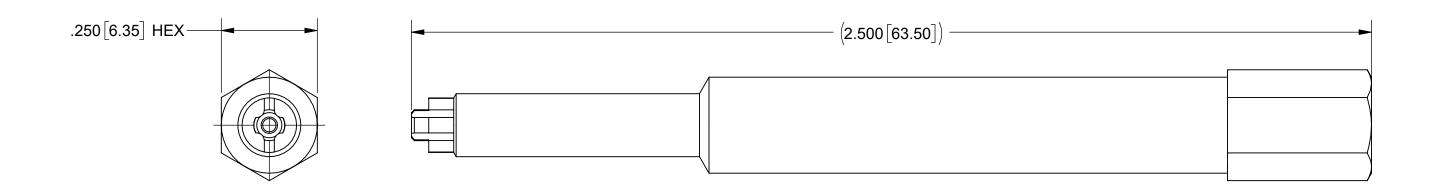

STAINLESS STEEL PER ASTM A564, ALLOY UNS S17400, TYPE 630, CONDITION A. **HEX SHAFT**:

FINISH:

HEX SHAFT: NICKEL PER SAE AMS 2404, CLASS 1.

INSTALLATION TORQUE: 4 TO 6 IN-LBS. FOR USE WITH SV P/N 3211-20003 OR SIMILAR.

MATERIAL:	SEE NOTES
FINISH:	SEE NOTES
SURFACE AF	rea: N/A
	PROPRIETARY
IS THE SOLE I ANY REPROD WITHOUT THE	ATION CONTAINED IN THIS DRAI PROPERTY OF SV MICROWAVE UCTION IN PART OR AS A WHO E WRITTEN PERMISSION OF VE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010
.XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES

±.030 ±.010 ±.010 ±.005 ENSIONS AND TOLERANCES M - 1994	1) ALL DIMENSIONS ARE IN INCHES IMILLIMETERS 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES , 005 R. MAX. 4) CHAM. 181 & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: SO ON COMMON CENTERS TO BE CONCENT WITHIN ,005 T.I.R. 7) REMOVE ALL BURRS

UNLESS OTHERWISE SPECIFIED

THIRD ANGLE PROJECTION	DRAWN:	FED 03/01/11
	CHECKED:	STW 03/01/1
	APPROVED:	STW 03/01/1



SMPM FD MALE SHROUD DRIVER

SIZE B	DWG. NO.	500-32	2-008
S	CALE: 4:1		SHEET 1 OF 1