


ROHS COMPLIANT

# PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 46496	06/17	GPF
A	DCN 49744	04/20	STW

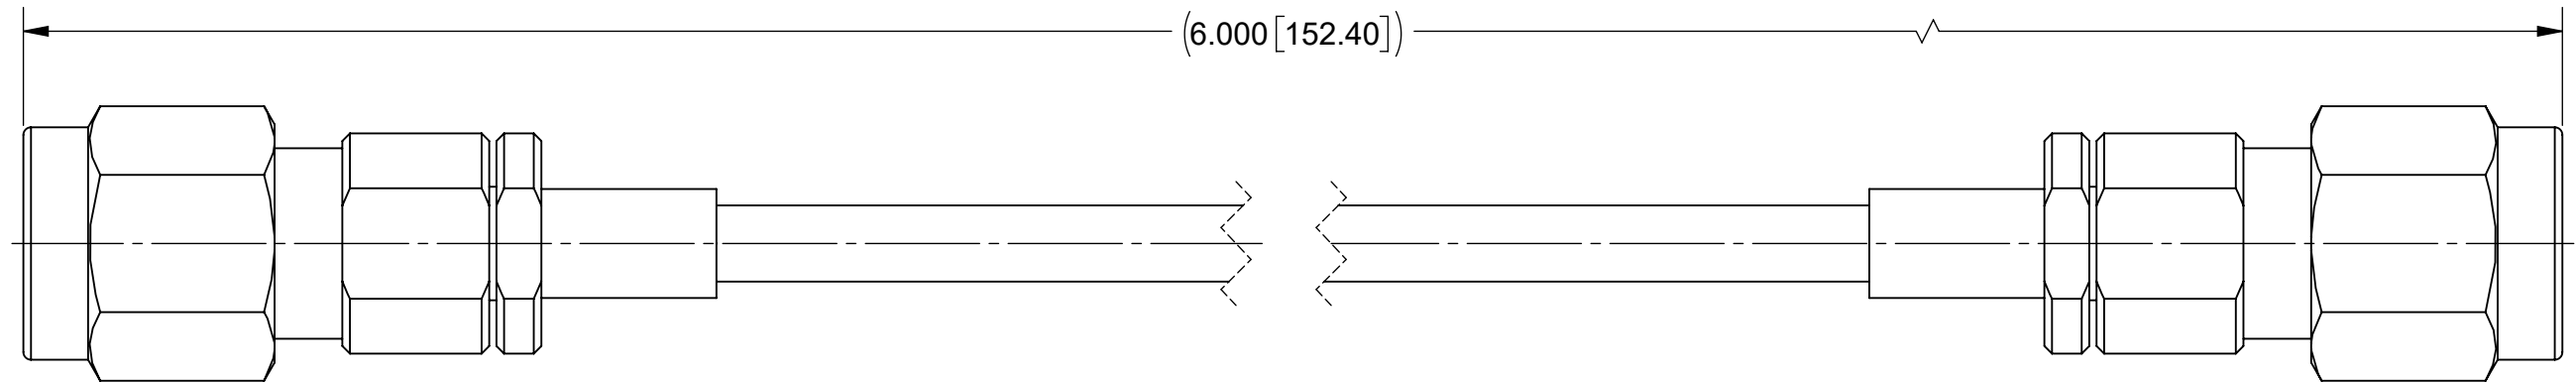

**MATERIAL:**



CONNECTORS: 2X 2.92mm STRAIGHT PLUG (SF1511-60071)

CABLE: T-FLEX 405 (200-70-139)

SHRINK TUBING: M23053/5

## PERFORMANCE:

IMPEDANCE: 50 OHMS  
FREQ. RANGE: DC TO 40.0 GHz.

MATERIAL: SEE NOTES		DIMENSIONS ARE IN INCHES TOLERANCES:		UNLESS OTHERWISE SPECIFIED		 www.svmicrowave.com	
FINISH: SEE NOTES		FRACTIONAL: $\pm 1/64$ ANGULAR: $X^\circ \pm 1^\circ 0'$ $X^\circ Y' \pm 15'$		1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 32-MIL-STD-10. 6) DIA. 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS			
SURFACE AREA: N/A		DECIMAL: $.X \pm .030$ $.XX \pm .010$ $.XXX \pm .005$				TITLE: 2.92mm MALE TO 2.92mm MALE FOR T-FLEX 405	
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994		DRAWN: VB 06/02/17 CHECKED: GPF 06/02/17 APPROVED: GPF 06/02/17		SIZE DWG. NO. 7015-0803 SCALE: 4:1	
		THIRD ANGLE PROJECTION 				SHEET 1 OF 1	