


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	DCN 56821	04/25	SEE PDM

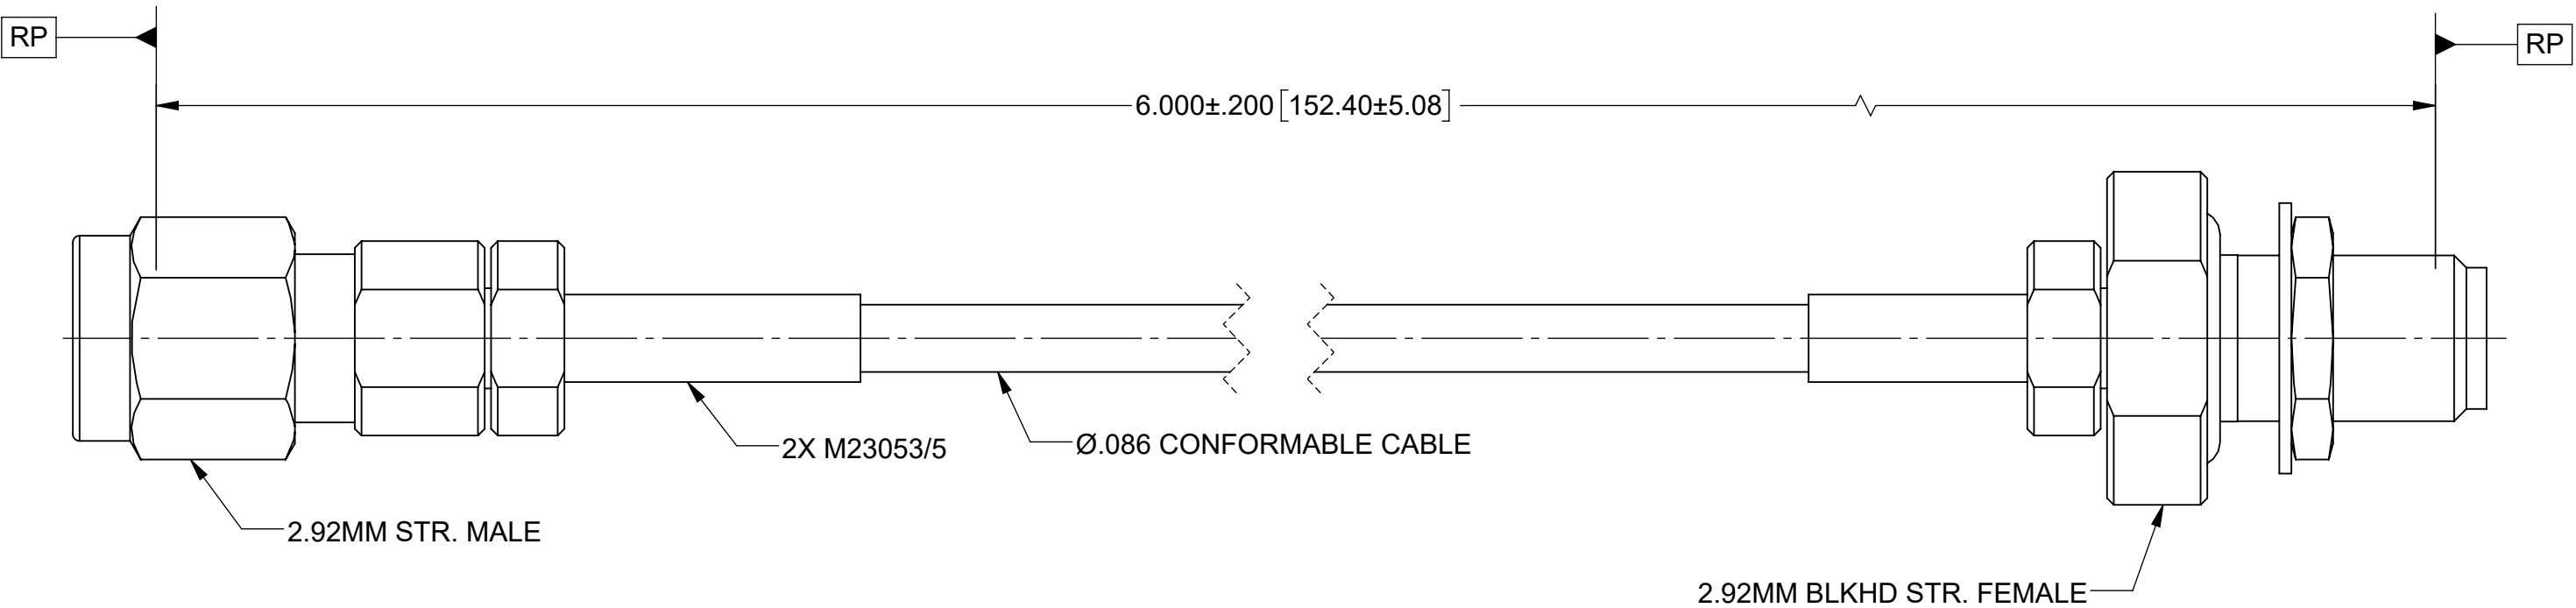

MATERIAL:

CONNECTORS:	2.92MM STR. MALE	(SF1511-60071)
	2.92MM BULKHEAD STR. FEMALE	(SF1521-60025)
CABLE:	Ø.086 CONFORMABLE CABLE	(200-70-047)
SHRINK TUBING:	M23053/5	

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 40.0 GHz.
VSWR:	1.40:1 MAX. DC TO 18.0 GHz.
	1.60:1 MAX. DC TO 40.0 GHz.
INSERTION LOSS:	1.47dB MAX. DC TO 40.0 GHz.

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--