
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 42984	04/19	GPF
Α	DCN 48594	05/23	GPF

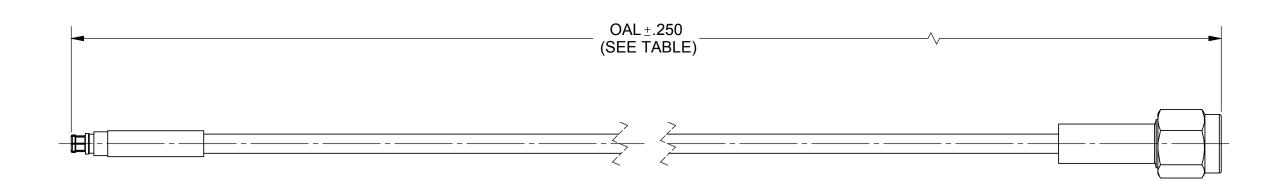

MATERIAL:

CONNECTORS: SMPM JACK (3221-40006)

SMA PLUG (SF2906-6002)

T-FLEX 405 CABLE:

SHRINK TUBING: M23053/5

SV P/N	OAL
7032-7526	6.000
7032-7527	12.000

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz

MATERIAL:	SEE NOTES
FINISH:	SEE NOTES
SURFACE AREA:	N/A
PR	OPRIETARY
IS THE SOLE PROP ANY REPRODUCTION	CONTAINED IN THIS DRAWIN ERTY OF SV MICROWAVE, IN DN IN PART OR AS A WHOLE ITEN PERMISSION OF IC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:			
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'			
DECIMAL: .X ±.030 .XX ±.010 .XXX +.005			
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994			

FRACTIONAL: ±1/64 ANGULAR: X* ±1°0′ X*X' ±15′ DECIMAL: .X ±.030	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 15T & LAST THREADS. 5) SURFACE ROUGHNESS 63 x MIL-STD-10. 6) DIA: SO N COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.IR. 7) REMOVE ALL BURRS	
THIRD ANGLE PROJECTION	DRAWN:	SJ 04/24/19
	CHECKED:	GPF 04/24/19
\(\psi\)	APPROVED:	GPF 04/24/19

UNLESS OTHERWISE SPECIFIED

MICROWAVE	
www.svmicrowave.com	

TITLE: SMPM JACK TO SMA PLUG FOR Ø.085 T-FLEX 405 CABLE ASSEMBLY

SIZE B	DWG. NO.	7032-752	26-7527
S	CALE: 2:1		SHEET 1 OF 1