
PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
В	DCN 57285	06/25		
			SEE PDM	

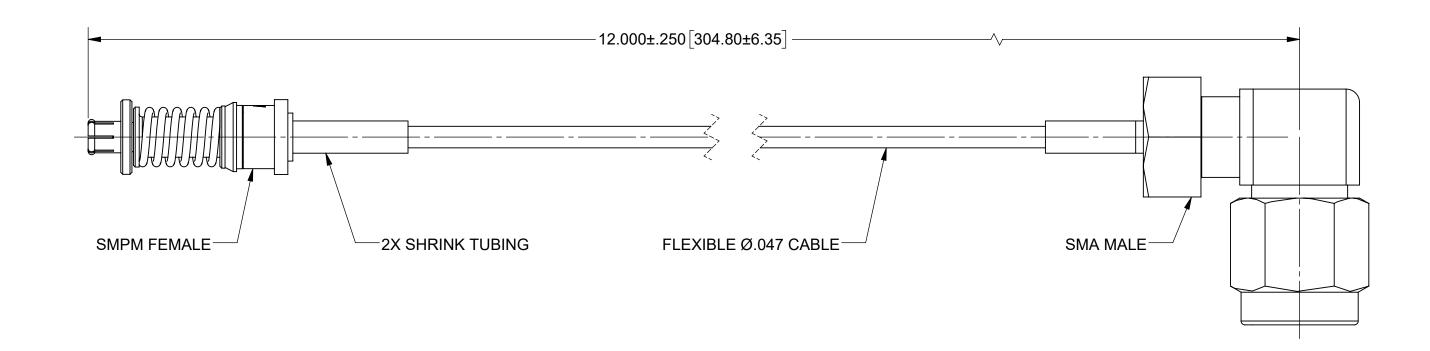

COMPONENTS:

CONNECTORS SMPM FEMALE VITA 67.3 (3221-40071)

SMA MALE R/A (2912-61002)

CABLE: FLEXIBLE Ø.047 CABLE (200-70-214)

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 18.0 GHz.

	DIMENSIONS ARE IN IN	E IN INCHES TOLERANCES:		
	FRACTIONAL: ±1/64	ANGULAR: X° ±1°0' X°X' +15'		
	DECIMAL: .X ±.030	V V 713		
_	.XX ±.010			

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION	DRAWN:	KRR 05/09/23
	CHECKED:	SEE PDM
	APPROVED:	SEE PDM

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING
3) BREAK CORNERS & EDGES 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63.4ML-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC
WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

MICROWAVE

TITLE: SMPM FEMALE VITA 67.3 TO SMA MALE R/A 12" CABLE ASSEMBLY FOR Ø.047 CABLE

5/09/23 SIZE DWG. NO. 7032-9726