
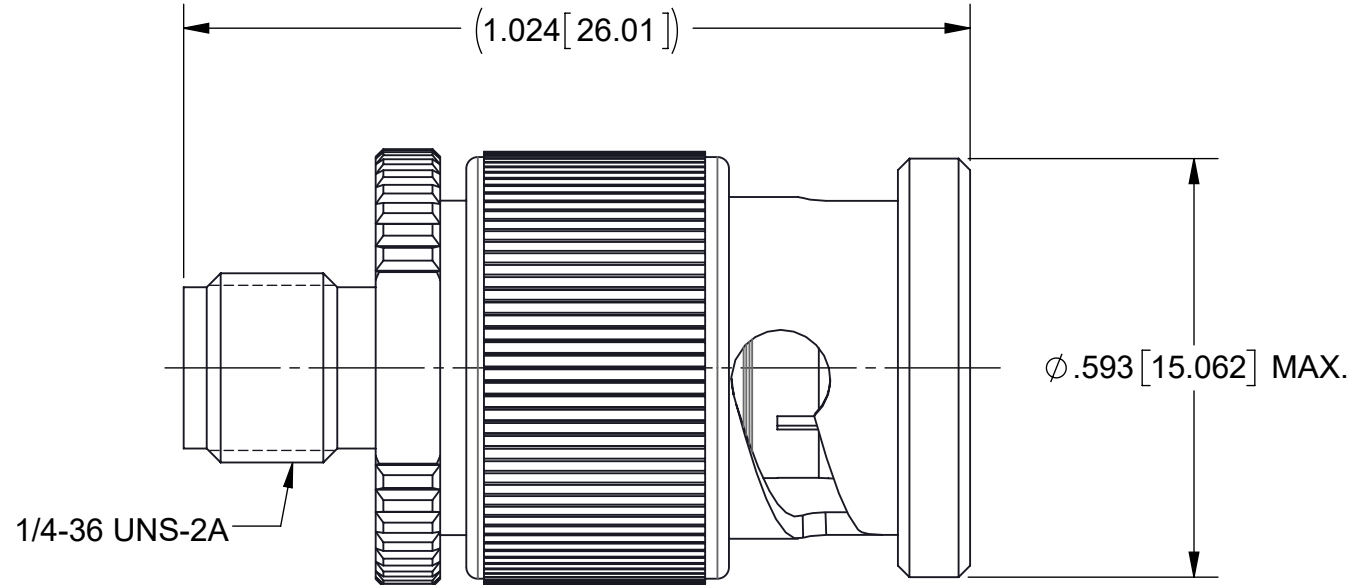



REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B	DCN 41869	11/15	DAL
C	REV. DCN 53565	12/27/23	STW

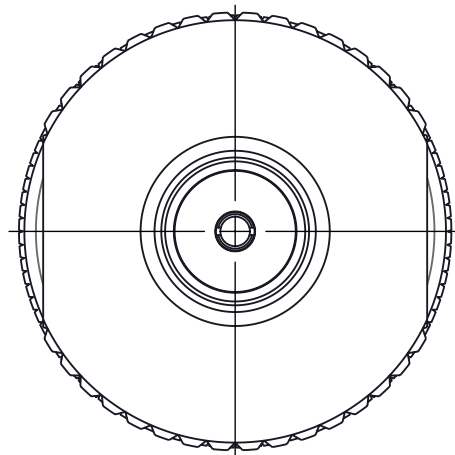

BODY: PASSIVATED PER AMS 2700.

CENTER CONTACT: GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27
OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .000050" MIN.

BAYONET: NICKEL PER AMS-QQ-N-290, CLASS 1, GRADE G.

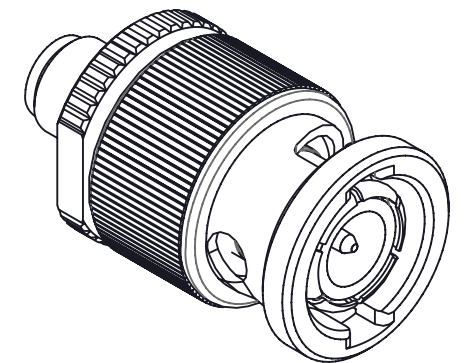

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 4.0 GHz.
VSWR: 1.30:1 MAX. DC TO 4.0 GHz.

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X'X'' ±15'	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA. 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409	
FINISH:	SEE NOTES	DECIMAL: .XX ±.030 .XXX ±.010 .XXX ±.005		TITLE:	SMA JACK TO BNC PLUG STRAIGHT ADAPTER
SURFACE AREA:	N/A	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994		SIZE DWG. NO.	B M55339/44-30001
PROPRIETARY		THIRD ANGLE PROJECTION	DRAWN: JRG 01/16/98	SCALE: 4:1	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.			CHECKED: STW 01/19/98		SHEET 1 OF 1
			APPROVED: STW 01/19/98		