

ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
-	NRN 44656	03/20	STW	

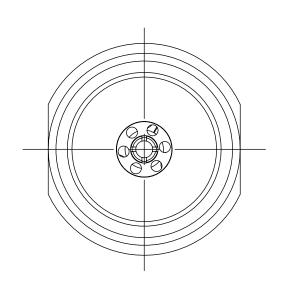

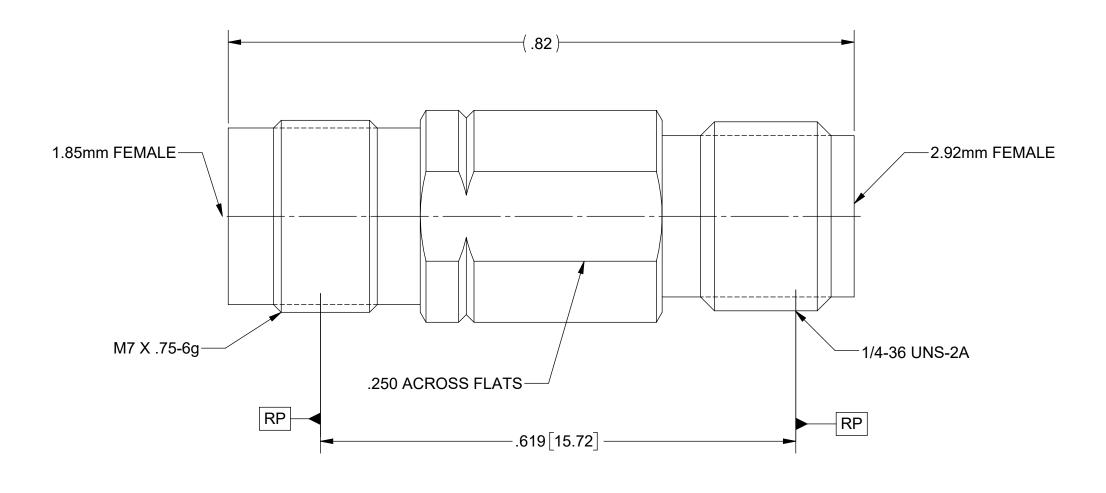

MATERIAL:

BODY & INSERTS: STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1

OR ASTM A582 TYPE 303, CONDITION A.

CONTACT: BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04.

INSULATORS: POLYETHERIMIDE (ULTEM 1000) PER ASTM D5205.

FINISH:

BODY & INSERTS: PASSIVATED PER AMS 2700

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, CONTACT:

OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:


IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 40.0 GHz.

	DIMENSIONS ARE IN INCHES TOLERANCES:				
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'				
	DECIMAL: .X ±.030 .XX ±.010 .XXX +.005				
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994				
RAWING	THIRD ANGLE PROJECTION				

ACTIONAL: ±1/64 ANGULAR: X° ±1°0′ X°X′ ±15′ CIMAL: .X ±.030 XX ±.010 XXX ±.005 TERPRET DIMENSIONS AND TOLERANCES R ASME Y14.5M - 1994	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63.4 MIL-STD-10. 6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	
HIRD ANGLE PROJECTION	DRAWN:	JMC 08/11/17
	CHECKED:	
	APPROVED:	

UNLESS OTHERWISE SPECIFIED

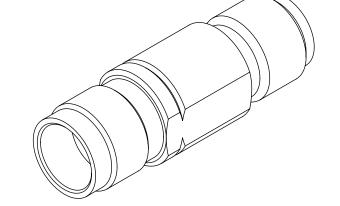



ADAPTER 1.85mm FEMALE TO 2.92mm FEMALE

SIZE CAGE CODE DWG. NO. B 95077 SF1133-6021 SCALE: 4:1