



PRODUCT DATA DRAWING

| REVISION HISTORY | | | |
|------------------|-------------|-------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| D | DCN 59684 | 05/26 | SEE PDM |

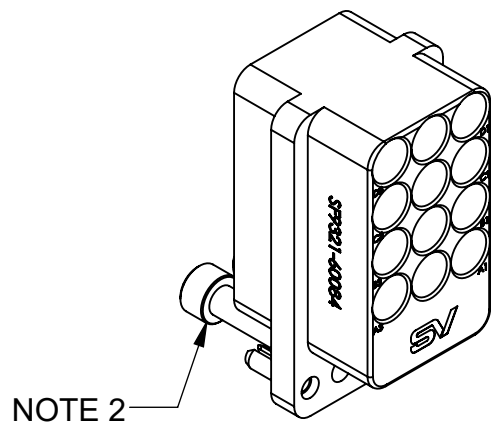

NOTE 2

| HOLE CHART | | |
|------------|-------|-------|
| HOLE No. | X | Y |
| ORIGIN | 0.000 | 0.000 |
| A1 | .360 | .365 |
| A2 | .215 | .365 |
| A3 | .070 | .365 |
| B1 | .360 | .510 |
| B2 | .215 | .510 |
| B3 | .070 | .510 |
| C1 | .360 | .655 |
| C2 | .215 | .655 |
| C3 | .070 | .655 |
| D1 | .360 | .800 |
| D2 | .215 | .800 |
| D3 | .070 | .800 |

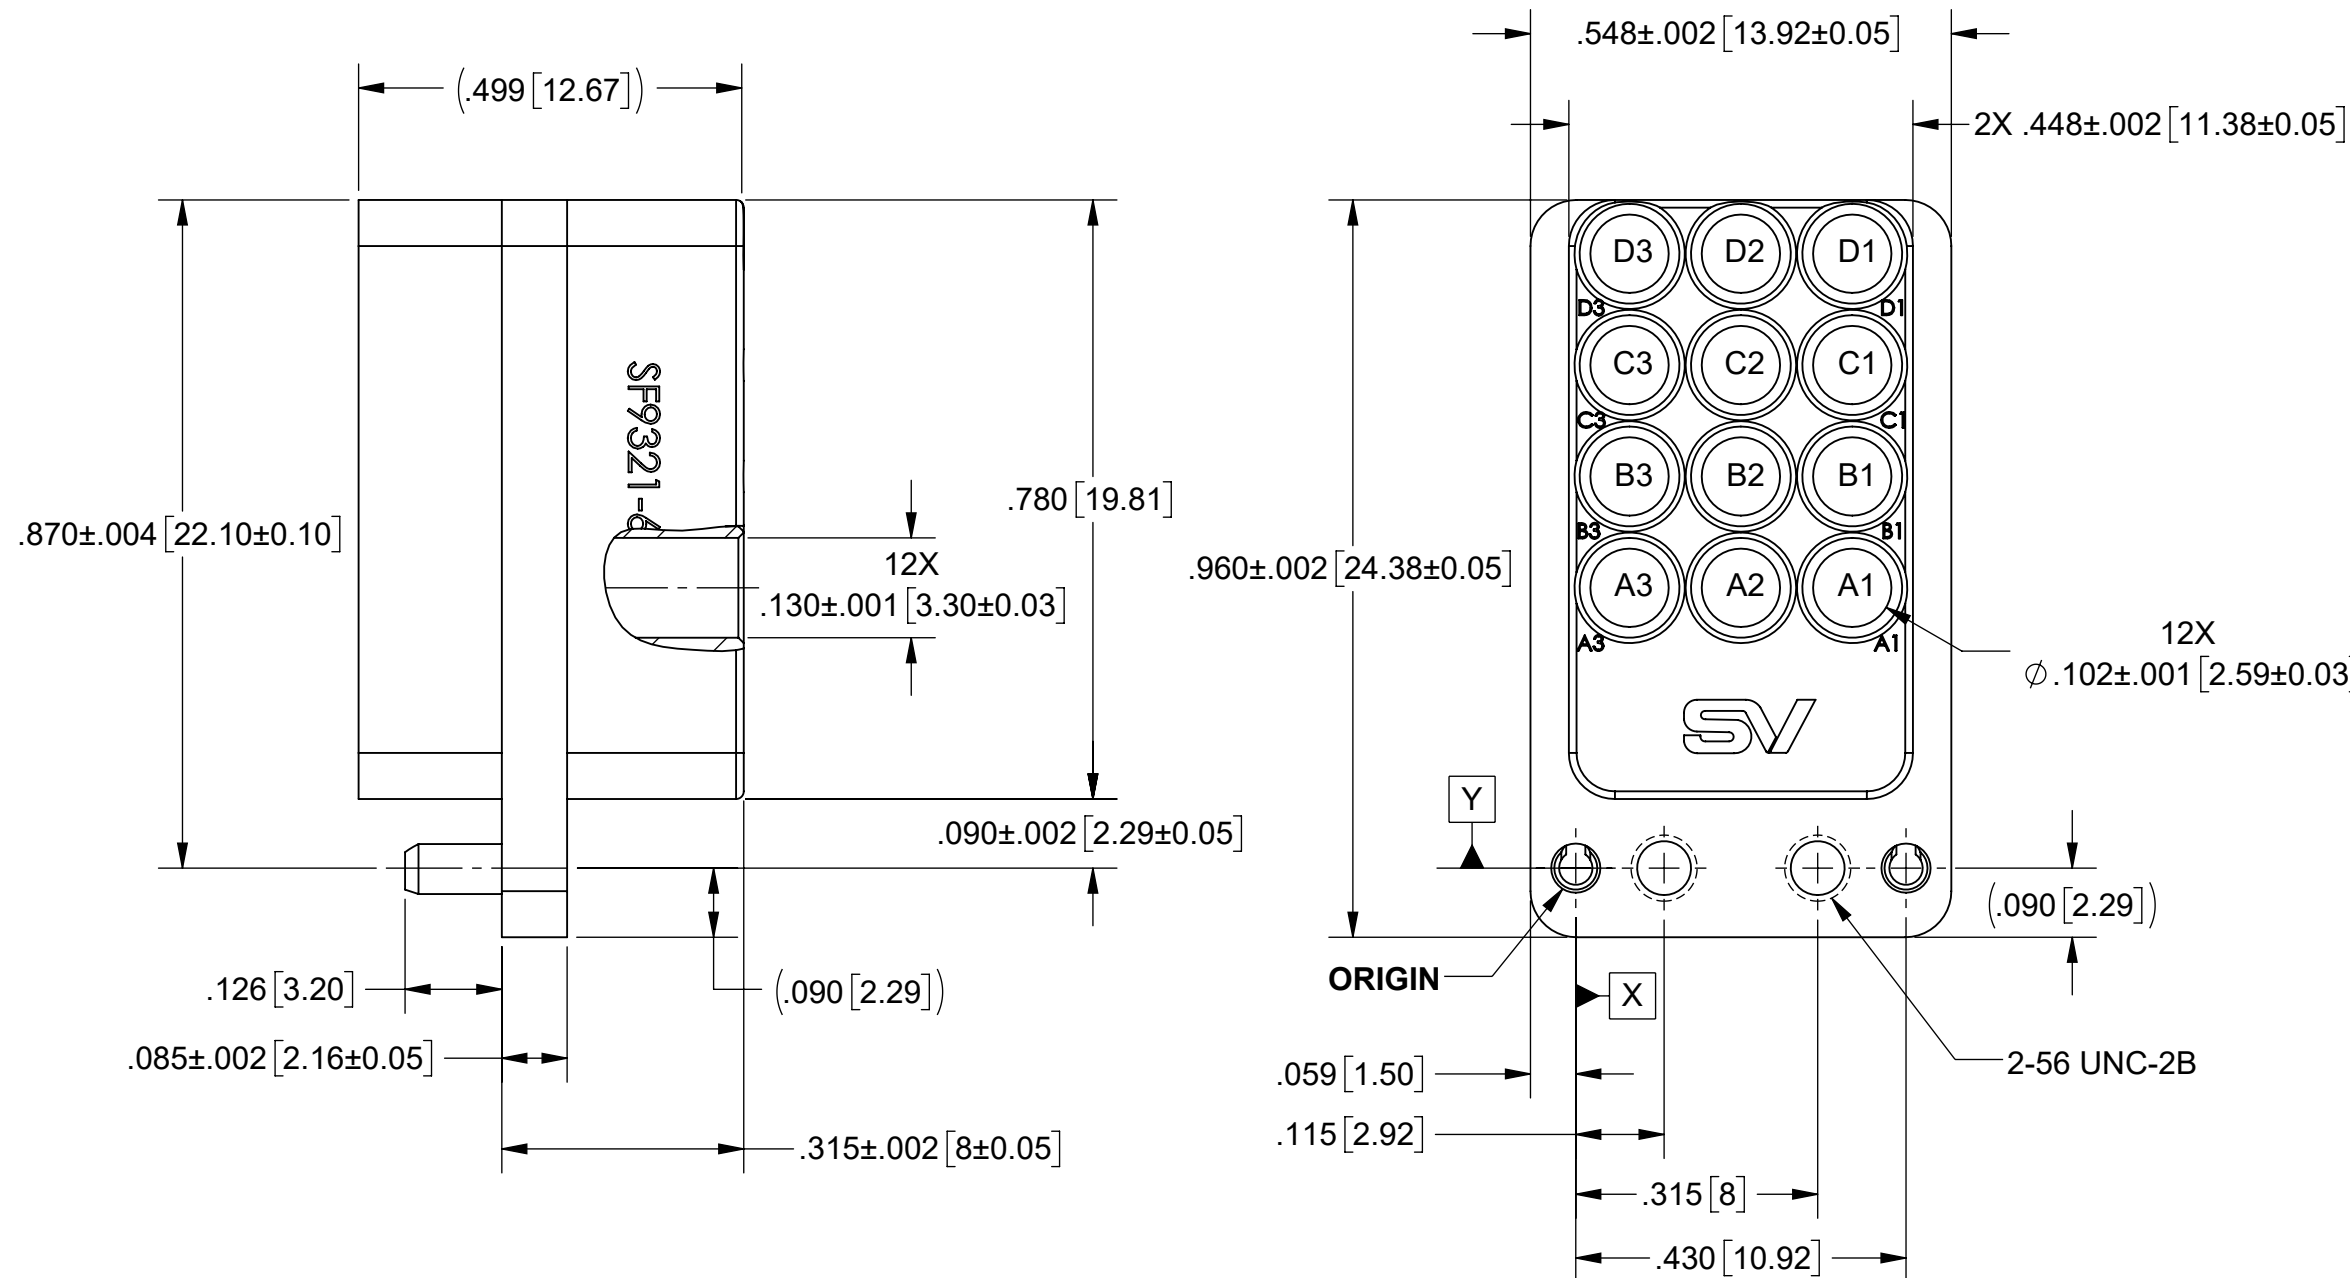

MATERIAL:

BODY: STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1; OR ASTM A582 TYPE 303, COND. A

SPRING PINS: 420 STAINLESS STEEL

SCREWS: 18-8 STAINLESS STEEL

FINISH:

BODY: PASSIVATED PER AMS-2700

SCREWS: PASSIVATED

NOTES:

- DESIGNED FOR USE WITH SF9311-60166.
- DATE CODES 2623 AND LATER INCLUDE THREE SETS OF MOUNTING SCREWS, COVERING PCB THICKNESSES OF .063"-.102", .097"-.133", AND 160"-.196".

| | | | | |
|--|--|--|---|---|
| MATERIAL: SEE NOTES | DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X'X' ±15' | UNLESS OTHERWISE SPECIFIED | <p>Amphenol www.svmicrowave.com</p> | |
| FINISH: SEE NOTES | DECIMAL: X ±.030 .XX ±.010 .XXX ±.005 | 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS | | TITLE: VITA 67.3 BACKPLANE MODULE D, 12 PORT, SMPS |
| SURFACE AREA: N/A | INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994 | THIRD ANGLE PROJECTION | DRAWN: SJ 05/02/19 CHECKED: SEE PDM APPROVED: SEE PDM | SIZE DWG. NO. SF9321-60084 SCALE: 4:1 SHEET 1 OF 1 |
| PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED. | | | | |