


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 60080	06/26	SEE PDM

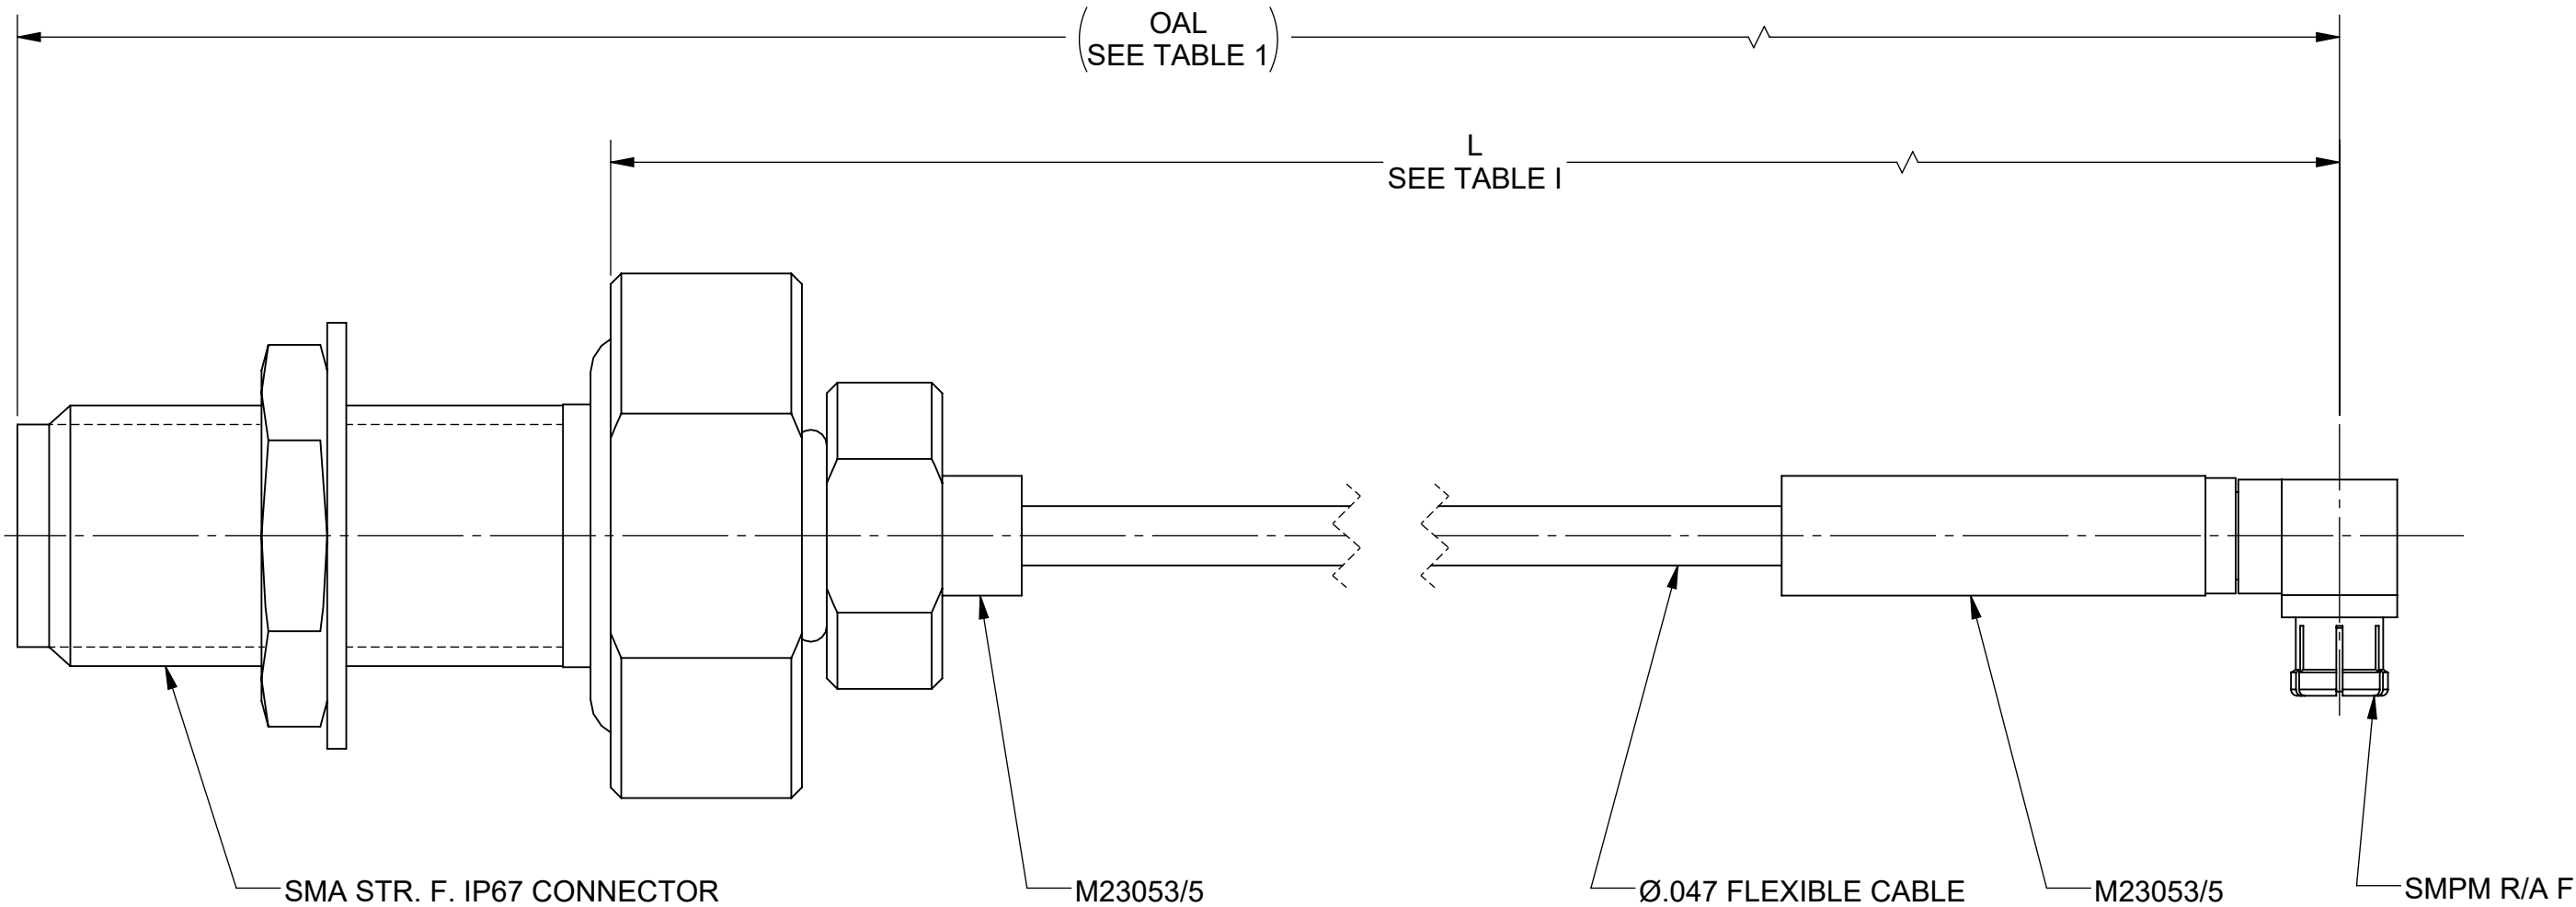

COMPONENTS:

CONNECTORS: SMA STR. F. IP67 CONNECTOR (2921-61262)
SMPM SWEPT FEMALE R/A CONNECTOR (3222-40006)

CABLE: Ø.047 FLEXIBLE CABLE (200-70-214)

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 18.0 GHz

TABLE I		
SV P/N	L	OAL
7032-10876	6.000±.250"	6.560"
7032-10877	12.000±.500"	12.560"

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' 	
-----------	-----------	---	--