


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	DCN 60295	07/26	SEE PDM

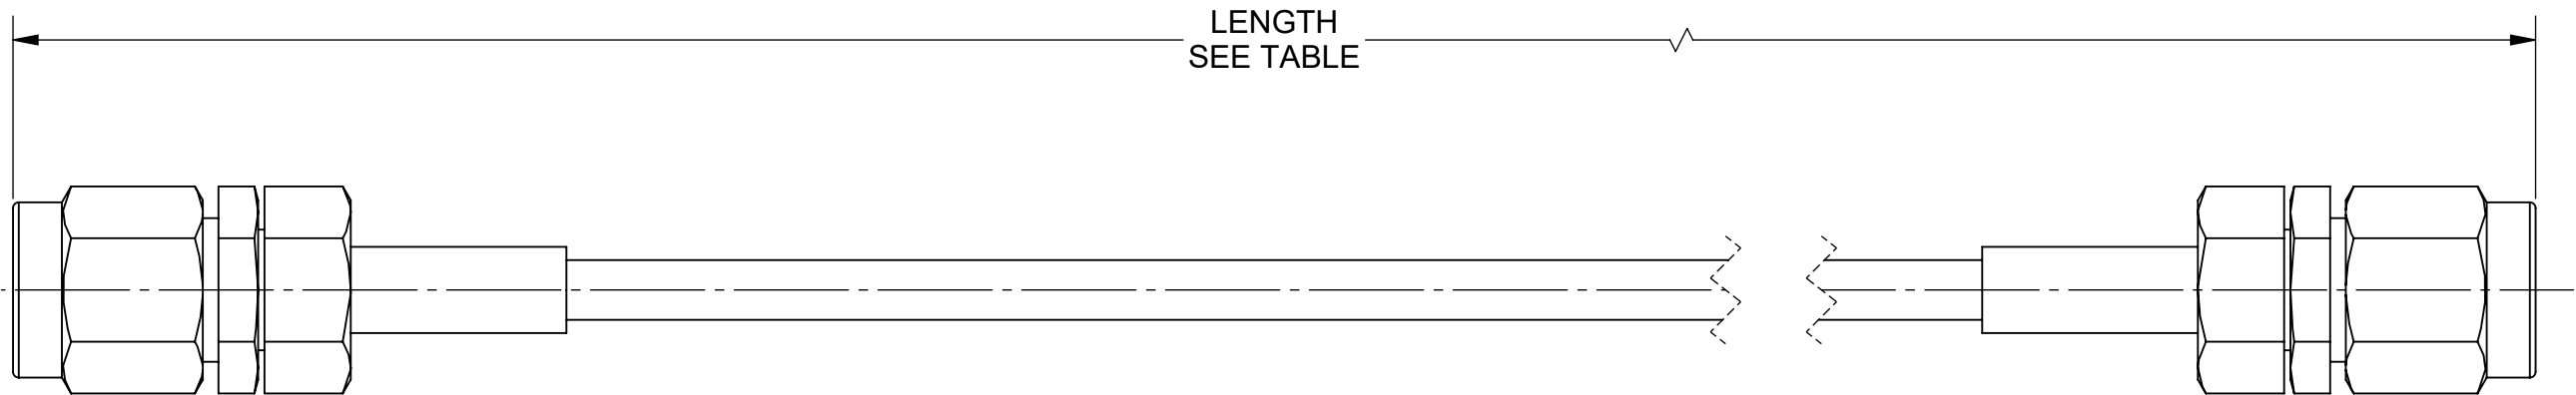

MATERIAL:

CONNECTORS:	2X SF1511-60030 (SVK STR MALE, 2.92 mm)
CABLE:	200-70-535 (FLEXIBLE ϕ .085 CABLE)
SHRINK TUBING:	M23053/5

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 40.0 GHz
VSWR:	1.5:1 MAX.
INSERTION LOSS:	SEE TABLE

SV PART NUMBER	LENGTH	TOLERANCE	LOSS(dB MAX)
7015-0615	12.000	$\pm$.125	1.97
7015-0616	24.000	$\pm$.250	3.71
7015-0617	36.000	$\pm$.250	5.45

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'
-----------	-----------	---