


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	DCN 60330	07/26	SEE PDM

PRODUCT DATA DRAWING

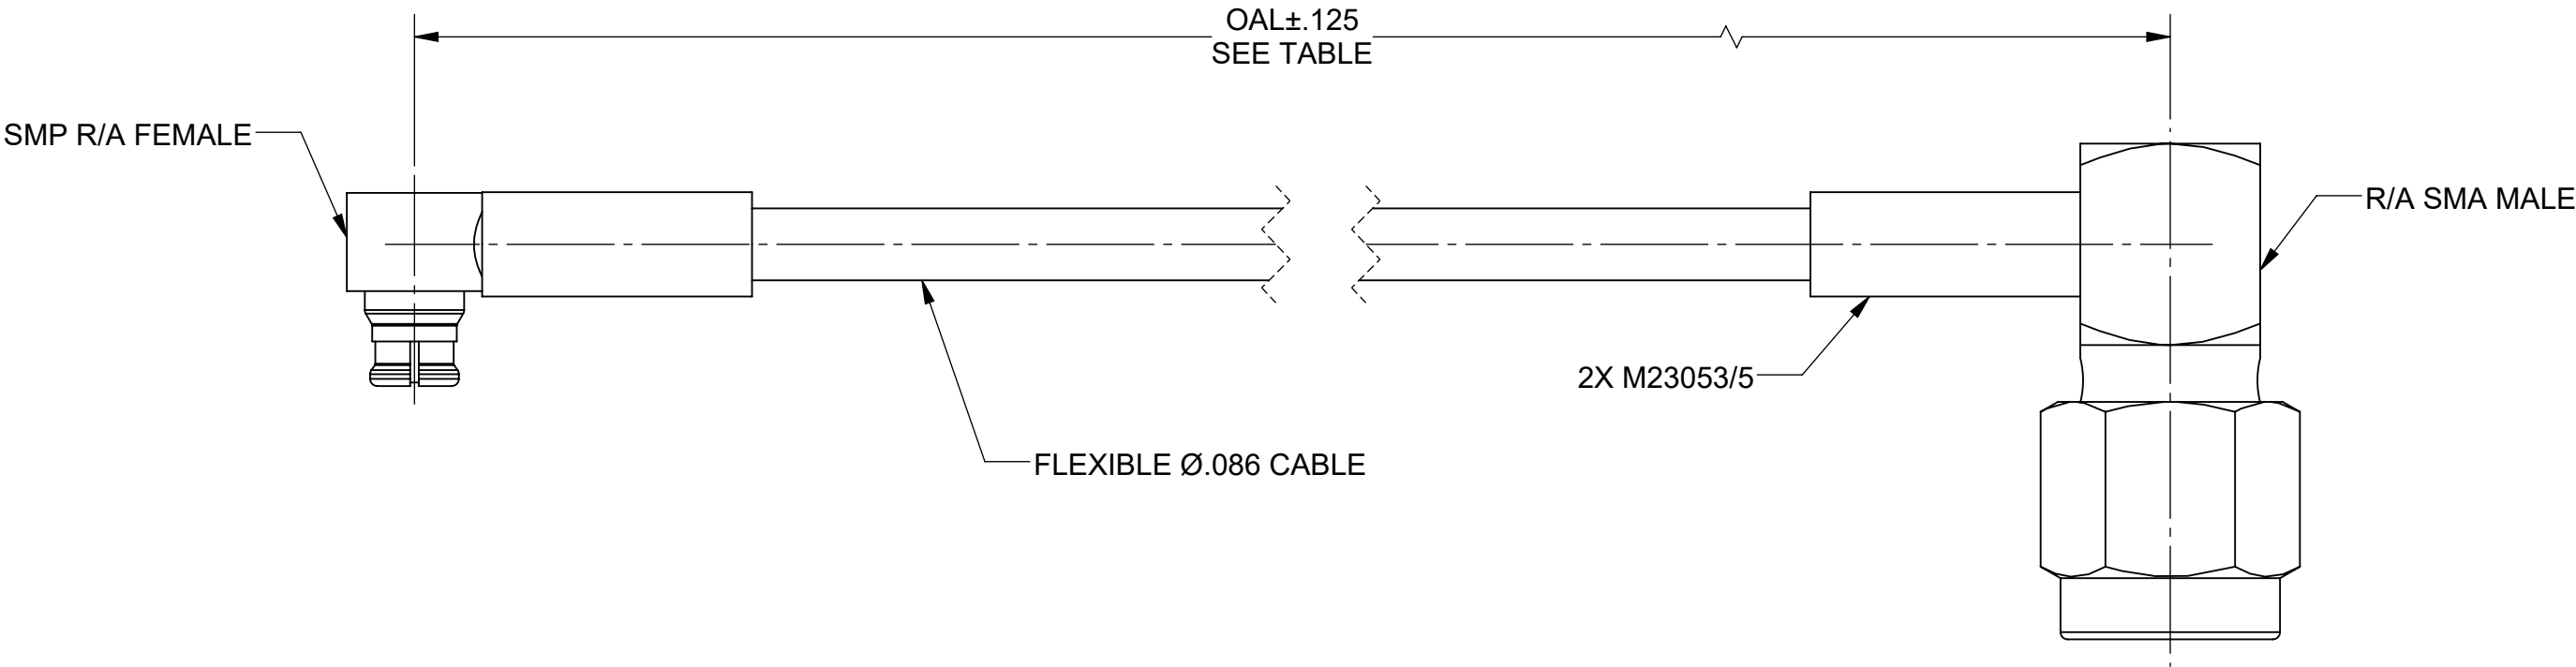

MATERIAL:

CONNECTORS:	SMP FEMALE (1222-4011), SMA MALE (SF2915-6001)
CABLE:	FLEXIBLE Ø.086 CABLE (200-70-535)
SHRINK TUBING:	M23053/5

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 12.4 GHz
VSWR:	1.50:1 MAX, DC TO 12.4 GHz
INSER. LOSS:	SEE TABLE

TABLE 1		
SV P/N	OAL	MAX INSER. LOSS
7012-1327	6.000	0.85 dB
7012-1328	12.000	1.27 dB
7012-1329	24.000	2.12 dB

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--