


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B	DCN 60384	08/26	SEE PDM

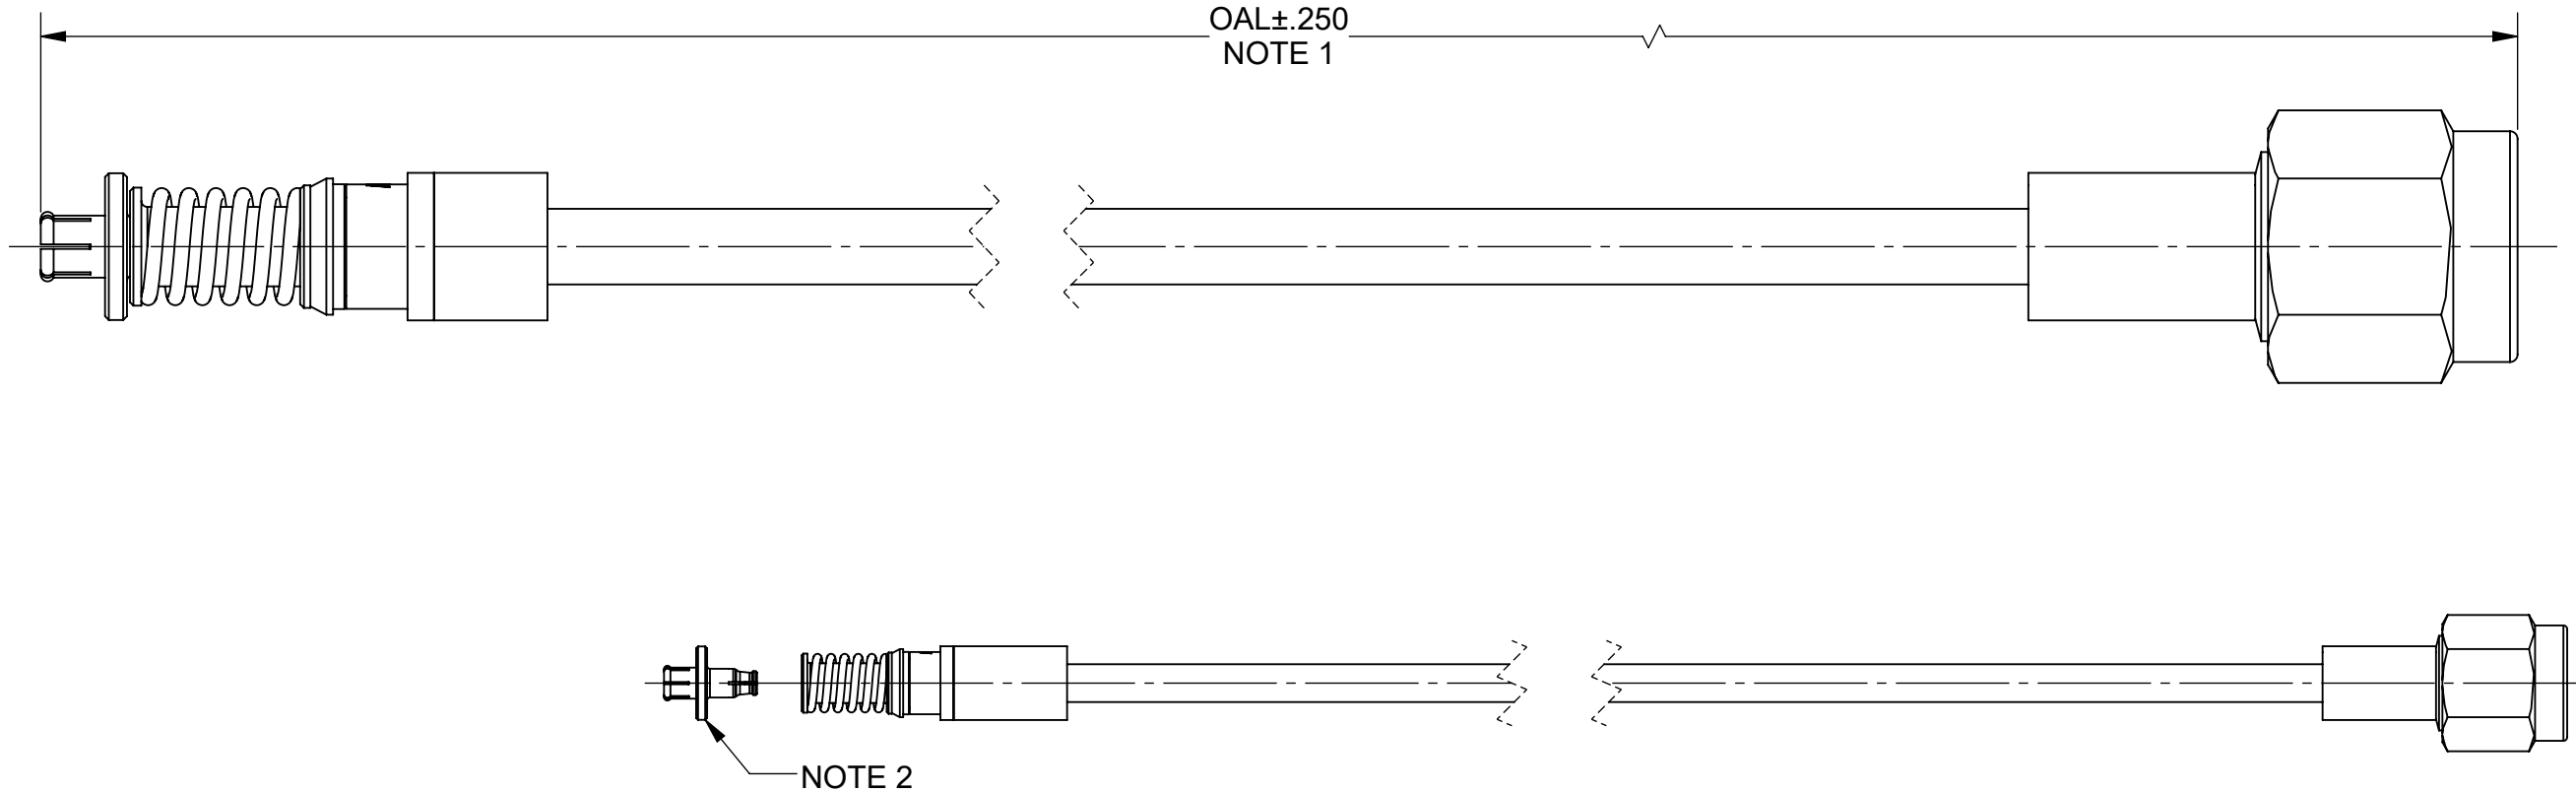

MATERIAL:

CONNECTORS: SMPM COMPRESSIBLE FEMALE (3221-40066)
SMA PLUG SOLDER ON (SF2906-6002)

CABLE: FLEXIBLE ϕ .085 CABLE (200-70-535)

SHRINK TUBING: M23053/5

NOTES:

- PART NUMBERS TO BE 7032-7434-XXX (XXX TO BE LENGTH "L"). FOR EXAMPLE, 7032-7434-120 WILL CORRESPOND TO AN OAL OF 12.000".
- ADAPTER SHIPPED SEPARATE WITH CABLE ASSEMBLY. CABLE WILL MEET OAL WHEN ADAPTER IS MATED TO CONNECTOR.
- ASSEMBLY INSTRUCTIONS TO BE SHIPPED WITH EACH ORDER OF CABLES.

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz.

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--