


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
B	DCN 60815	09/26	SEE PDM

PRODUCT DATA DRAWING

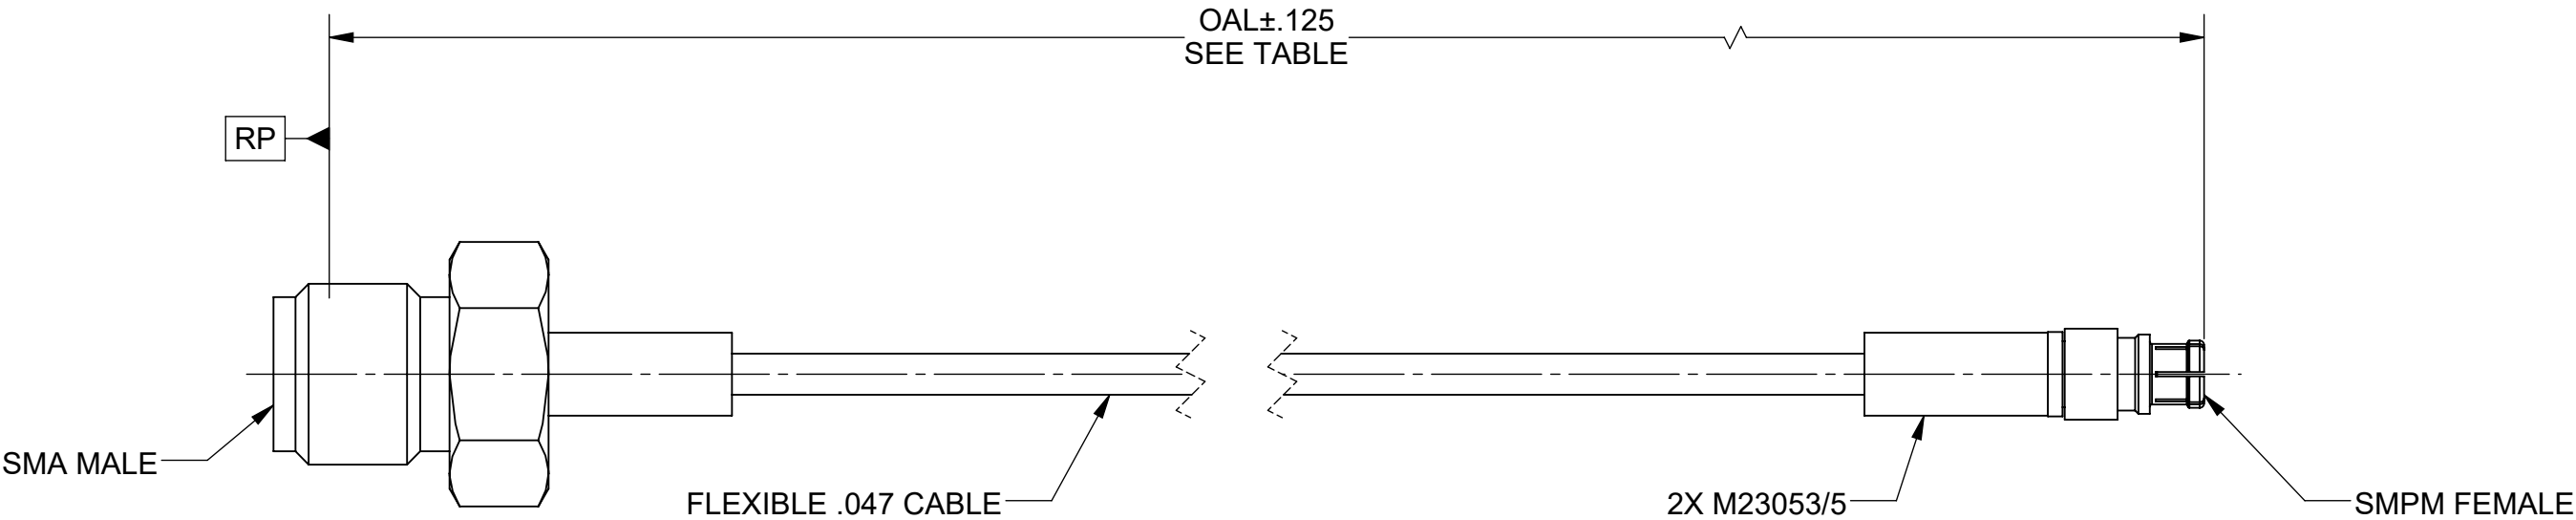

MATERIAL:

CONNECTORS: SMA MALE (2926-6015), SMPM FEMALE (3221-40007)

CABLE: FLEXIBLE .047 CABLE (200-70-214)

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 18 GHz
VSWR: 1.30:1 MAX, DC TO 18 GHz
INSER. LOSS: SEE TABLE

TABLE 1		
SV P/N	OAL	MAX INSER. LOSS
7029-2558	6.000	1.30 dB
7029-2559	12.000	2.18 dB
7029-2560	24.000	3.94 dB

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--