
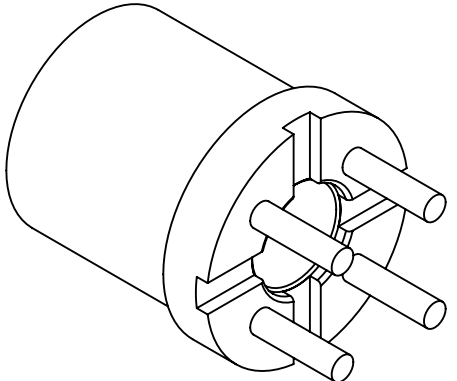
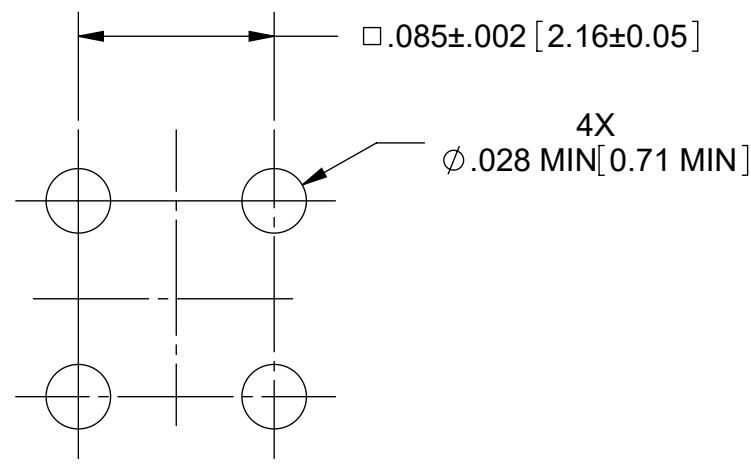
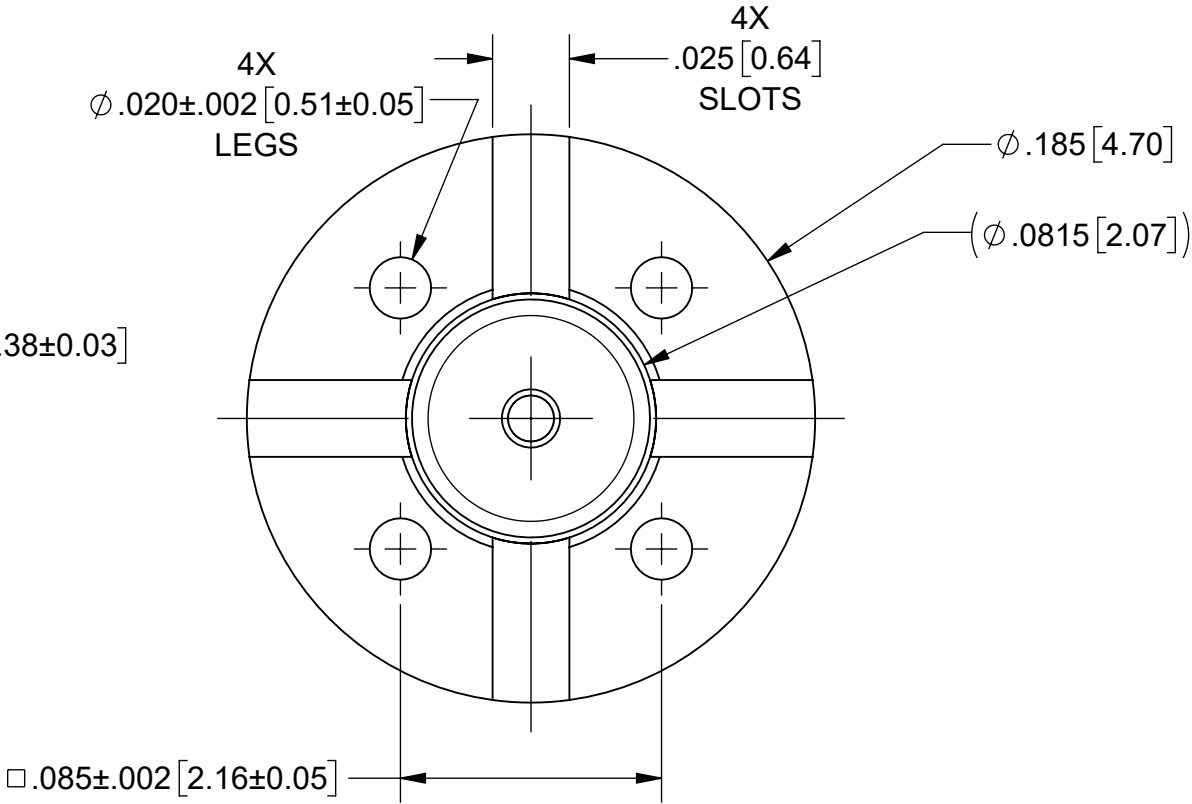


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 60982	10/26	SEE PDM

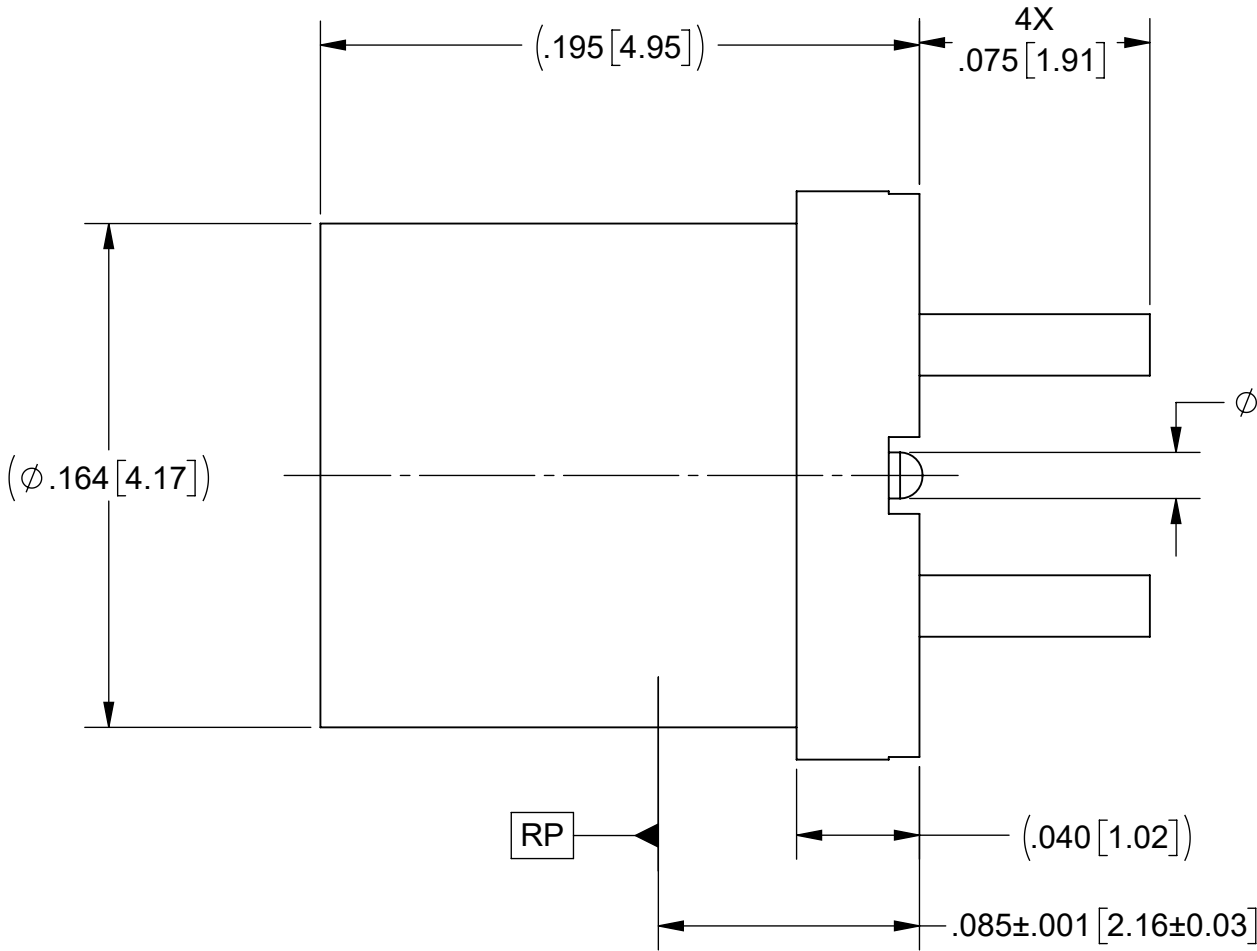

MATERIAL:

BODY & PIN: KOVAR PER ASTM-F15.
INSULATOR: GLASS (CORNING #7070 OR EQUIVALENT).

FINISH:

BODY & PIN: GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27
OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 26.5 GHz.

NOTES:
1. FOR RECOMMENDED FOOTPRINT TO YOUR SPECIFIC PCB,
PLEASE CONTACT SV MICROWAVE AT applications@svmicro.com

RECOMMENDED MOUNTING HOLE PATTERN

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:		UNLESS OTHERWISE SPECIFIED		 www.svmicrowave.com TITLE: SMP MALE BOARD MOUNT CONNECTOR	
FINISH:	SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' 					