
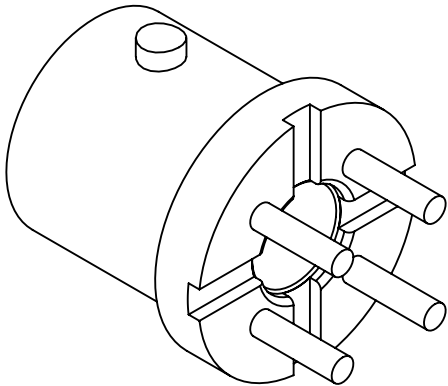
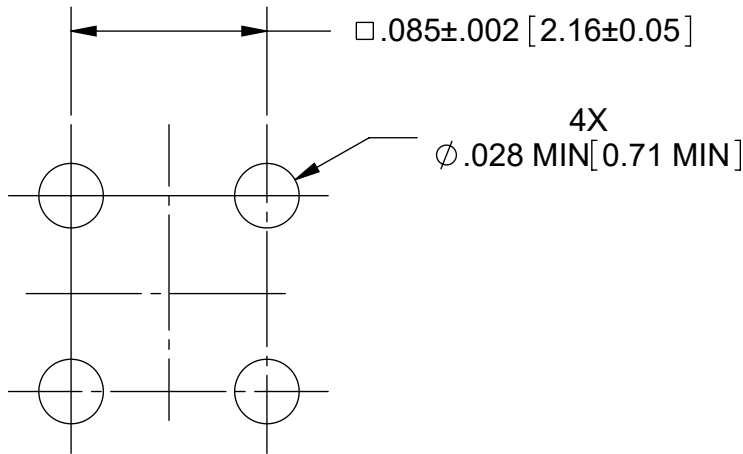
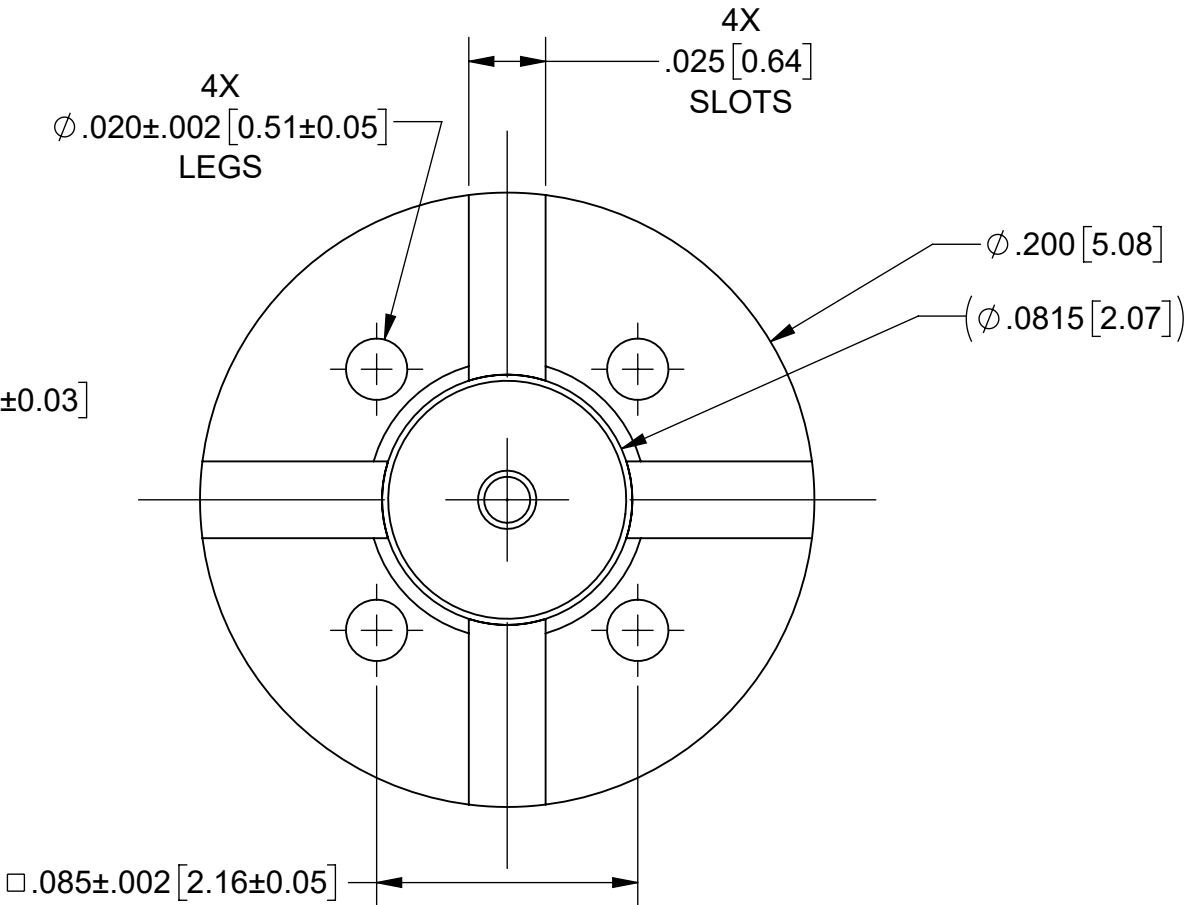


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 60982	09/26	SEE PDM

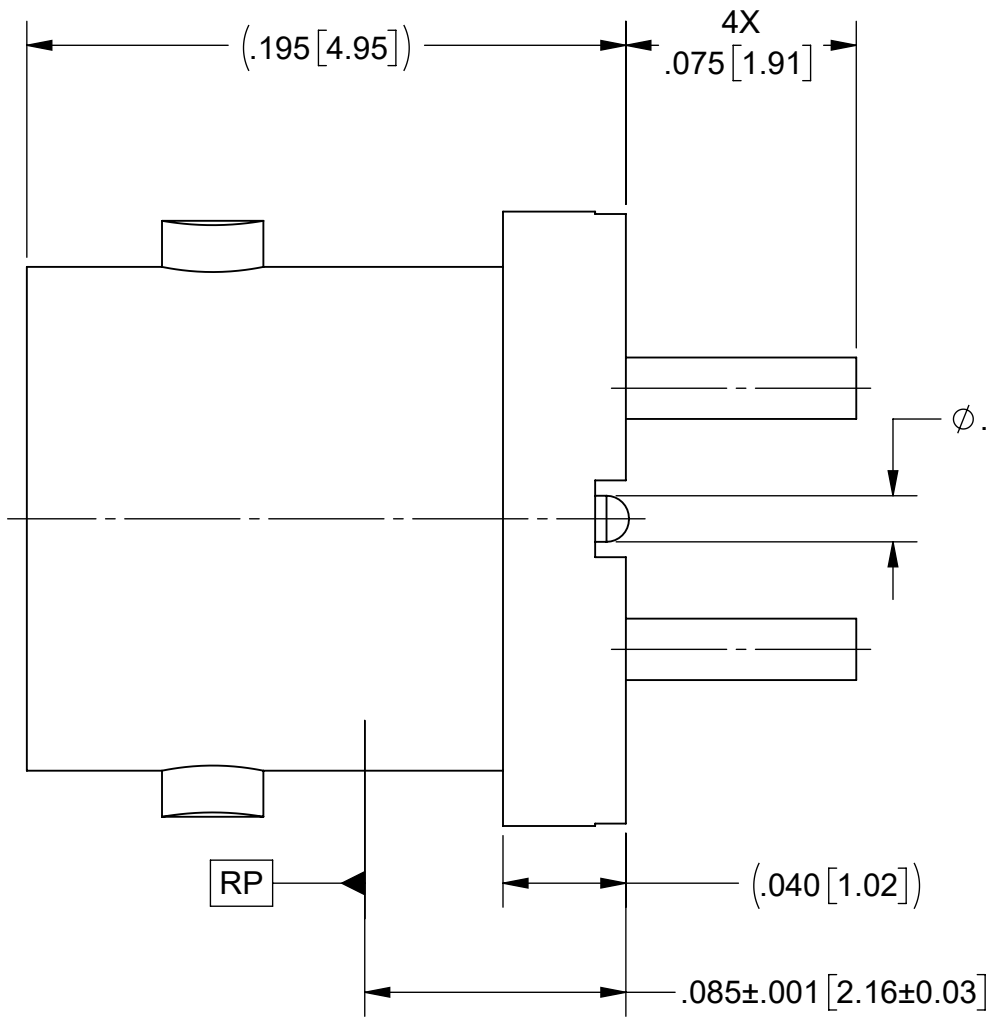

MATERIAL:

BODY & CONTACT: KOVAR PER ASTM-F15.
INSULATOR: GLASS (CORNING #7070 OR EQUIVALENT)

FINISH:

BODY & CONTACT: GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27
OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 26.5 GHz.

NOTE:
1. FOR RECOMMENDED FOOTPRINT TO YOUR SPECIFIC PCB, PLEASE
CONTACT SV MICROWAVE AT applications@svmicro.com

RECOMMENDED MOUNTING HOLE PATTERN

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--