



PRODUCT DATA DRAWING

| REVISION HISTORY | | | | | |
|------------------|-----|-------------|-------|----------|--|
| | REV | DESCRIPTION | DATE | APPROVED | |
| | - | NRN 45334 | 11/20 | STW | |
| | | | | | |
| | | | | | |

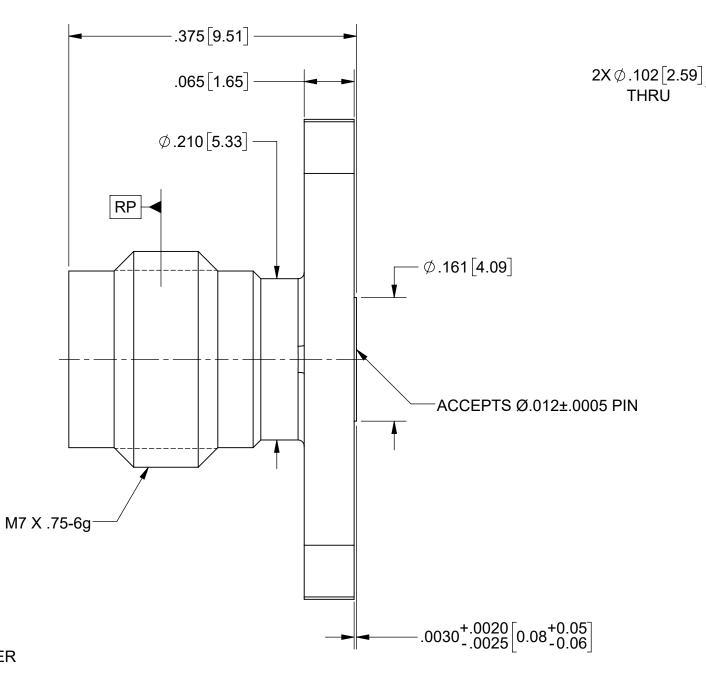

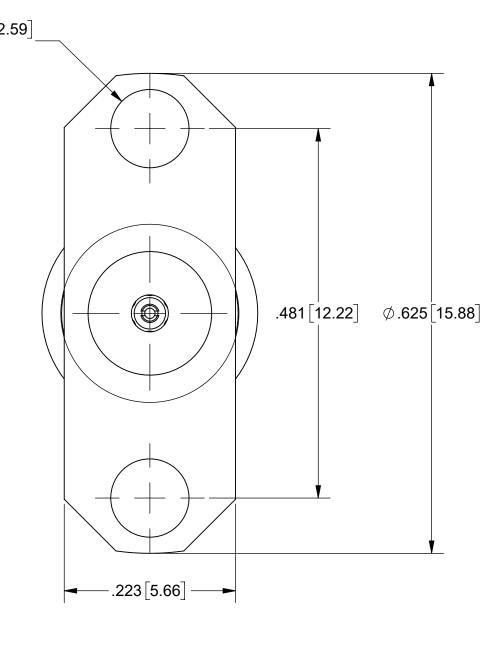

MATERIAL:

BODY & INSERT: STAINLESS STEEL

CONTACT: **BERYLLIUM COPPER**

INSULATOR: **ULTEM 1000**

FINISH:

BODY & INSERT: PASSIVATED

GOLD OVER NICKEL CONTACT:

PERFORMANCE:

IMPEDANCE: FREQ. RANGE: 50 OHMS DC TO 50.0 GHz

| MATERIAL: S | SEE NOTES |
|---------------------------------------|---|
| FINISH: S | SEE NOTES |
| SURFACE AREA: | N/A |
| PRO | OPRIETARY |
| IS THE SOLE PROPI ANY REPRODUCTION | CONTAINED IN THIS DRAWI ERTY OF SV MICROWAVE, ID IN IN PART OR AS A WHOLE ITEN PERMISSION OF C IS PROHIBITED. |

| DIMENSIONS ARE IN INCHES TOLERANCES: |
|---|
| FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15' |
| DECIMAL: X ±.030 .XX ±.010 .XXX ±.005 |
| INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994 |

| ERANCES | 3) BREAK CORNERS & I 4) CHAM. 15T & LAST TI 5) SURFACE ROUGHNE 6) DIA.'S ON COMMON (WITHIN .005 T.I.R. 7) REMOVE ALL BURRS | HREADS. SS 63 ₈ MIL-STD-10. CENTERS TO BE CONCENTRIC |
|---------|--|---|
| TION | DRAWN: | SJ 11/13/2 |

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]

| THIRD ANGLE PROJECTION | DRAWN: | SJ 11/13/20 |
|------------------------|-----------|--------------|
| | CHECKED: | STW 11/13/20 |
| | APPROVED: | STW 11/13/20 |



2.4mm JACK 2-HOLE FL. MT. ACCEPTS Ø.012±.0005 PIN

| SIZE B | DWG. NO. | 1621-60071 | |
|------------------|----------|------------|--------------|
| SCALE: 8:1 | | | SHEET 1 OF 1 |