

ROHS COMPLIANT


PRODUCT DATA DRAWING

REVISION HISTORY					
REV	DESCRIPTION	DATE	APPROVED		
01	PRELIMINARY	02/10	DAL		
-	DCN 41508	07/51	STW		







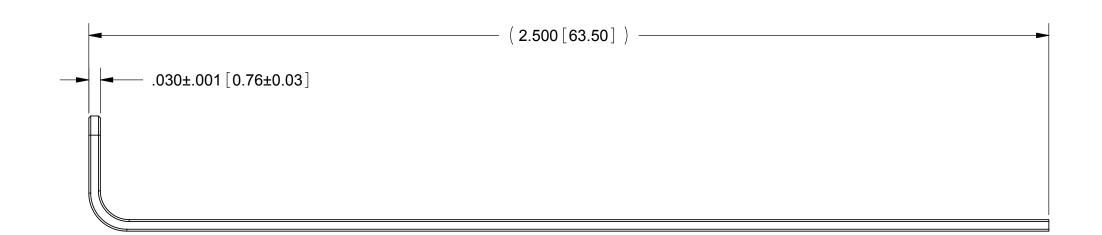

MATERIAL:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1

FINISH:

PASSIVATED PER AMS-2700

	DIMENSIONS ARE IN INCHES TOLERANCES:
_	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

FRACTIONAL: ±1/64 ANGULAR: X° ±1°0′ X°X′ ±15′ DECIMAL: .X ±.030	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES 005 F. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SUFFACE ROUGHNESS 63.MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 004 T.I.R. 7) REMOVE ALL BURRS	
THIRD ANGLE PROJECTION	DRAWN:	NHR 02/23/10
	CHECKED:	DAL 02/23/10
	APPROVED:	DAL 02/23/10

UNLESS OTHERWISE SPECIFIED



SMP FEMALE CABLE REMOVAL TOOL

SIZE B	CAGE CODE 95077	DWG.	NO.	500-12-0)19
SCALE: 4:1					QUEET 1