


PRODUCT DATA DRAWING

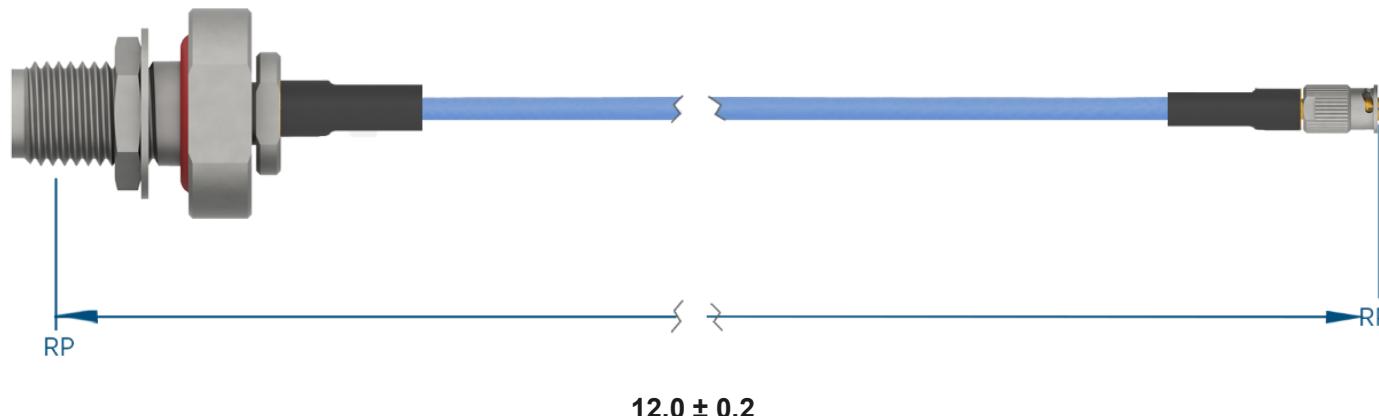

MATERIAL

CONNECTORS: 2.92mm Bulkhead Female ([SF1521-60045](#))
SMP Female QB ([1221-40051](#))

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 40 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 3.27 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches

SV Amphenol
MICROWAVE

TITLE:
2.92mm Bulkhead Female to SMP Female QB 12"
Cable Assembly for Ø.047 Flexible Coax

DWG. NO.
FB292-047-FQSMP-120

DRAWN
2022-10-14 13:54:55