


## PRODUCT DATA DRAWING

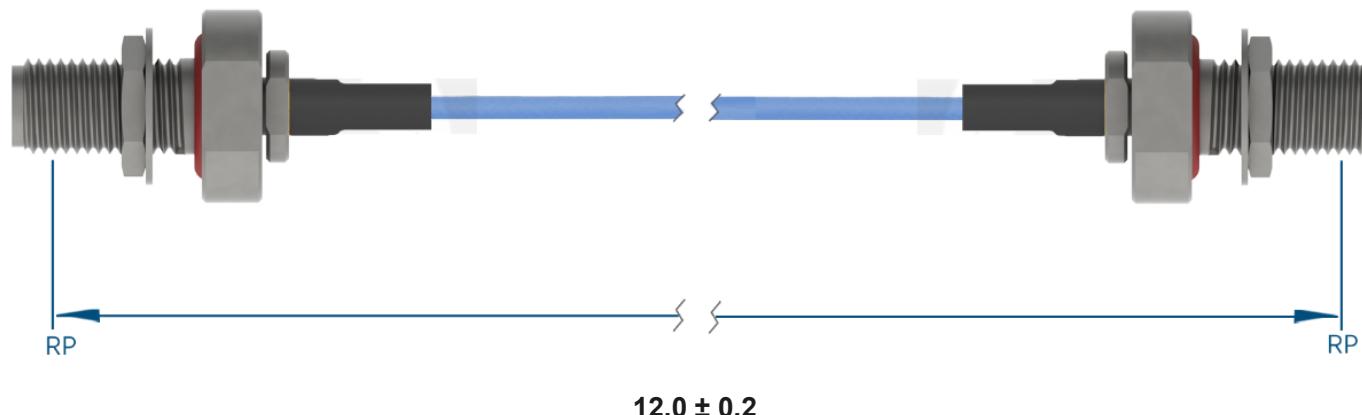

## MATERIAL

CONNECTORS: SMA Bulkhead Female ([2944-6001](#))  
SMA Bulkhead Female ([2944-6001](#))

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

## PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 2.26 dB Max

## NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:  
SMA Bulkhead Female to SMA Bulkhead Female 12"  
Cable Assembly for Ø.047 Flexible Coax

DWG. NO.  
[FBSMA-047-FBSMA-120](#)

DRAWN  
2022-10-17 12:06:29