


PRODUCT DATA DRAWING

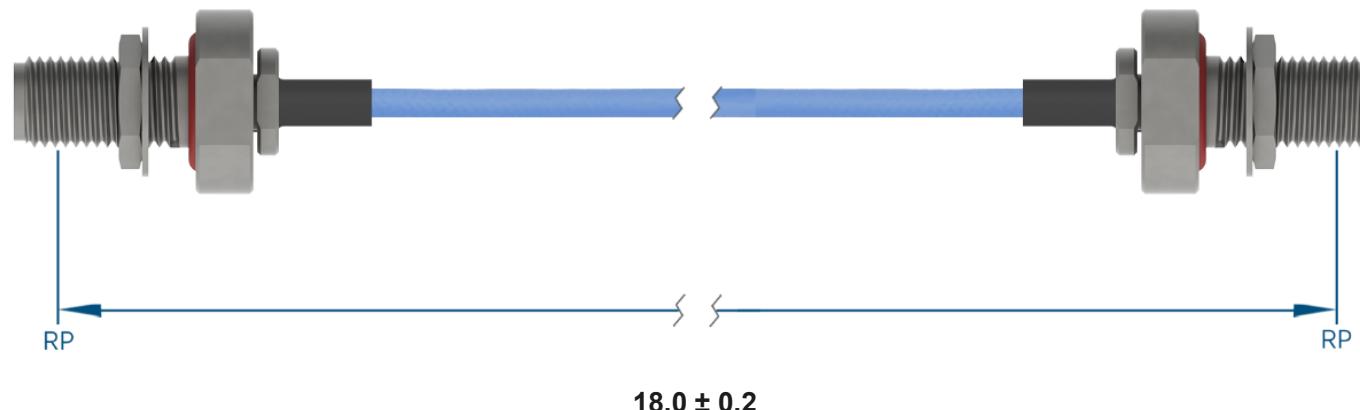

MATERIAL

CONNECTORS: SMA Bulkhead Female ([2946-6012](#))
SMA Bulkhead Female ([2946-6012](#))

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 1.78 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMA Bulkhead Female to SMA Bulkhead Female 18"
Cable Assembly for Ø.085 Flexible Coax

DWG. NO.

FBSMA-085-FBSMA-180

DRAWN

2022-10-17 12:23:20