


PRODUCT DATA DRAWING

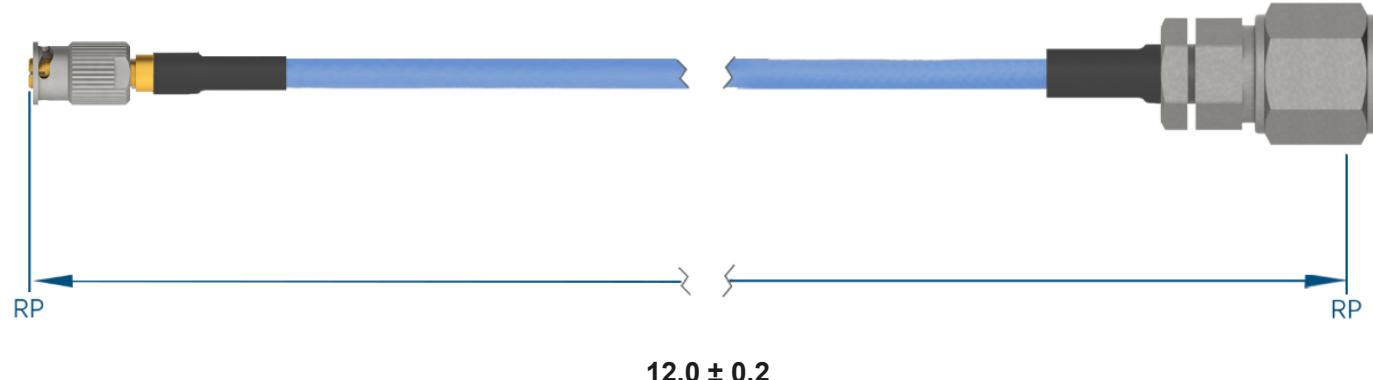

MATERIAL

CONNECTORS: SMP Female QB ([1221-40049](#))
1.85mm Straight Male ([SF3311-60003](#))
CABLE: Ø.085 Flexible Coax
SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms
FREQ. RANGE: DC to 40 GHz
VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz
INSERTION LOSS: 2.19 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMP Female QB to 1.85mm Straight Male 12" Cable
Assembly for Ø.085 Flexible Coax

DWG. NO.

FQSMP-085-MS185-120

DRAWN

2022-10-17 15:02:16