


## PRODUCT DATA DRAWING

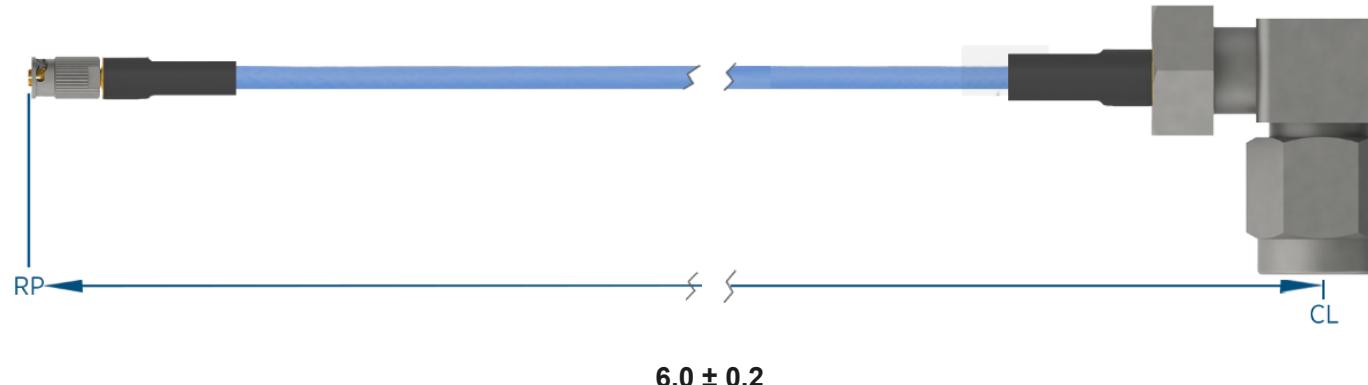

**6.0 ± 0.2**

**MATERIAL**

CONNECTORS: SMPM Female QB ([3221-60003](#))  
SMA R/A Male ([2912-61002](#))

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.4:1 Max, DC to 18.0 GHz  
1.6:1 Max, 18.0 + GHz

INSERTION LOSS: 1.30 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

SMPM Female QB to SMA R/A Male 6" Cable  
Assembly for Ø.047 Flexible Coax

## DWG. NO.

FQSMPM-047-MRSMA-060

## DRAWN

2022-10-17 16:10:35