


PRODUCT DATA DRAWING

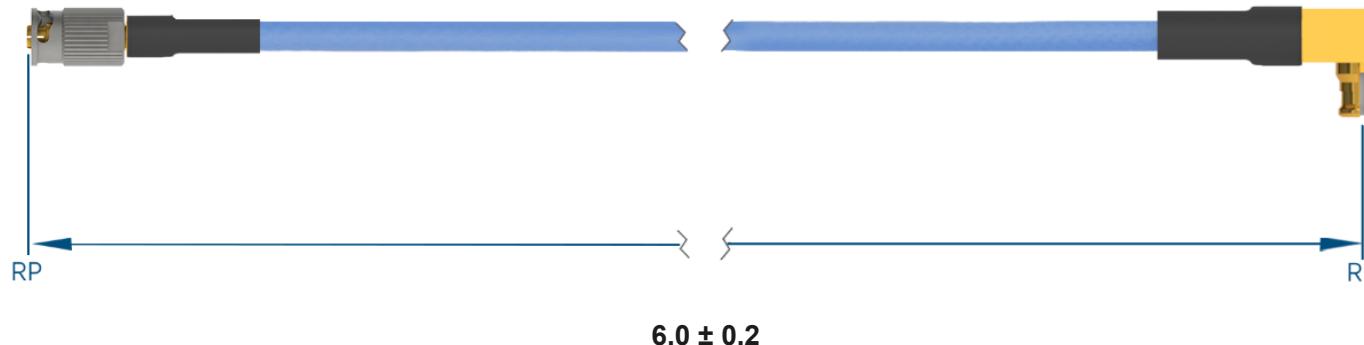

MATERIAL

CONNECTORS: SMPM Female QB ([3221-60004](#))
SMP R/A Female ([1222-4005](#))
CABLE: Ø.085 Flexible Coax
SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms
FREQ. RANGE: DC to 40 GHz
VSWR: 1.4:1 Max, DC to 18.0 GHz
1.6:1 Max, 18.0 + GHz
INSERTION LOSS: 1.35 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMPM Female QB to SMP R/A Female 6" Cable
Assembly for Ø.085 Flexible Coax

DWG. NO.

FQSMPM-085-FRSMP-060

DRAWN

2022-10-18 11:20:30