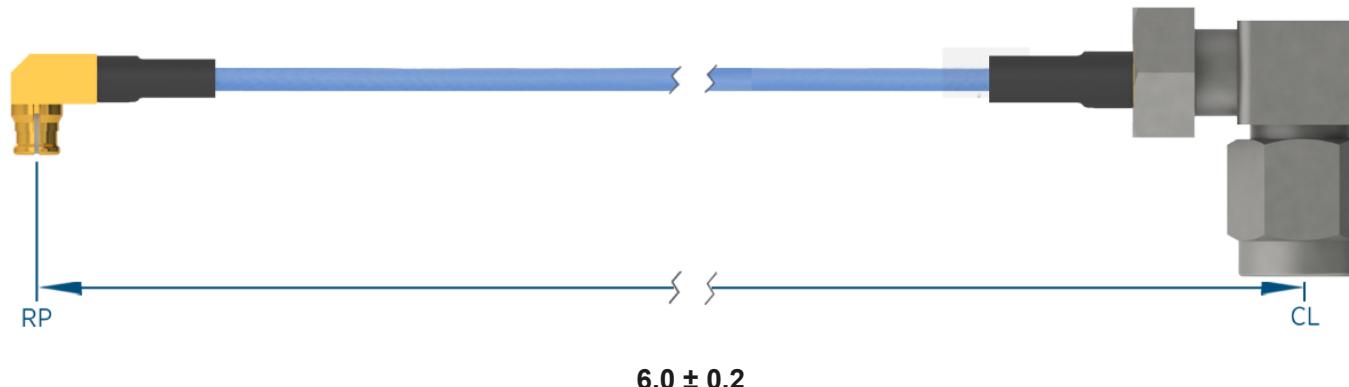


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMP R/A Female ([1222-4004](#))

SMA R/A Male ([2912-61002](#))

CABLE: Ø.047 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.4:1 Max, DC to 18.0 GHz  
1.6:1 Max, 18.0 + GHz

INSERTION LOSS: 1.30 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches

**SV** **Amphenol**  
**MICROWAVE**

TITLE:

SMP R/A Female to SMA R/A Male 6" Cable Assembly  
for Ø.047 Flexible Coax

DWG. NO.

FRSMP-047-MRSMA-060

DRAWN

2022-10-18 12:28:17