


PRODUCT DATA DRAWING

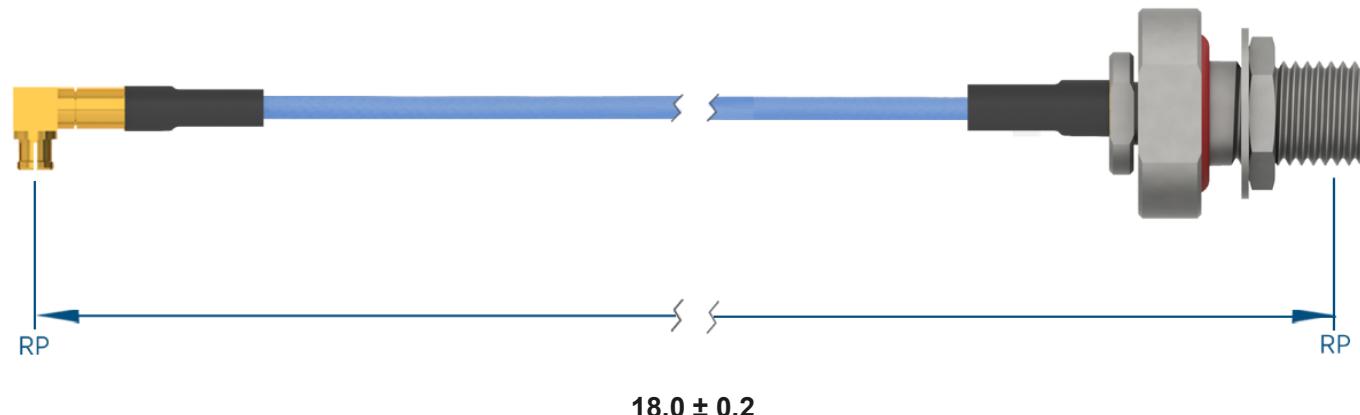

MATERIAL

CONNECTORS: SMPM R/A Female ([3222-40020](#))
2.92mm Bulkhead Female ([SF1521-60045](#))
CABLE: Ø.047 Flexible Coax
SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms
FREQ. RANGE: DC to 40 GHz
VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz
INSERTION LOSS: 4.65 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches

SV Amphenol
MICROWAVE

TITLE:
SMPM R/A Female to 2.92mm Bulkhead Female 18"
Cable Assembly for Ø.047 Flexible Coax

DWG. NO.
[FRSMPM-047-FB292-180](#)

DRAWN
2022-10-18 14:37:10