


PRODUCT DATA DRAWING

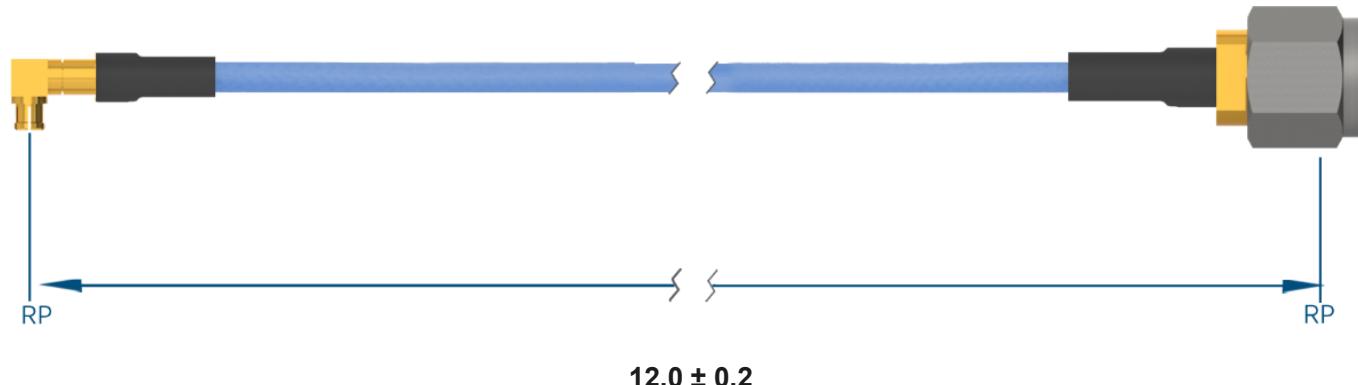

MATERIAL

CONNECTORS: SMPM R/A Female ([3222-40005](#))
SMA Straight Male ([SF2906-6002](#))

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 1.30 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMPM R/A Female to SMA Straight Male 12" Cable
Assembly for Ø.085 Flexible Coax

DWG. NO.

FRSMPM-085-MSSMA-120

DRAWN

2022-10-19 15:12:39