


PRODUCT DATA DRAWING

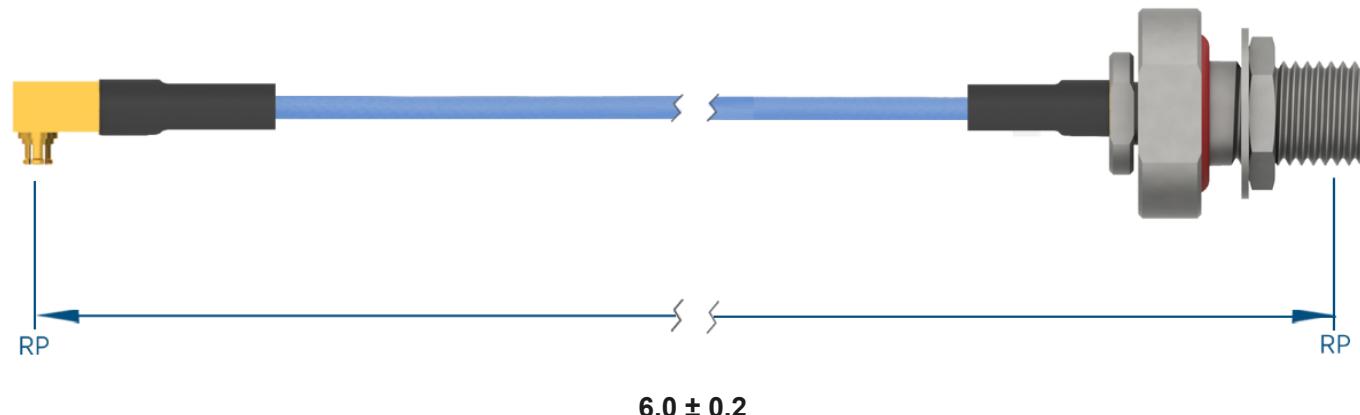

MATERIAL

CONNECTORS: SMPS R/A Female ([3822-40001](#))
2.92mm Bulkhead Female ([SF1521-60045](#))
CABLE: Ø.047 Flexible Coax
SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms
FREQ. RANGE: DC to 40 GHz
VSWR: 1.4:1 Max, DC to 18.0 GHz
1.6:1 Max, 18.0 + GHz
INSERTION LOSS: 1.89 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches

SV Amphenol
MICROWAVE

TITLE:
SMPS R/A Female to 2.92mm Bulkhead Female 6"
Cable Assembly for Ø.047 Flexible Coax

DWG. NO.
FRSMPS-047-FB292-060

DRAWN
2022-10-19 15:16:54