


## PRODUCT DATA DRAWING

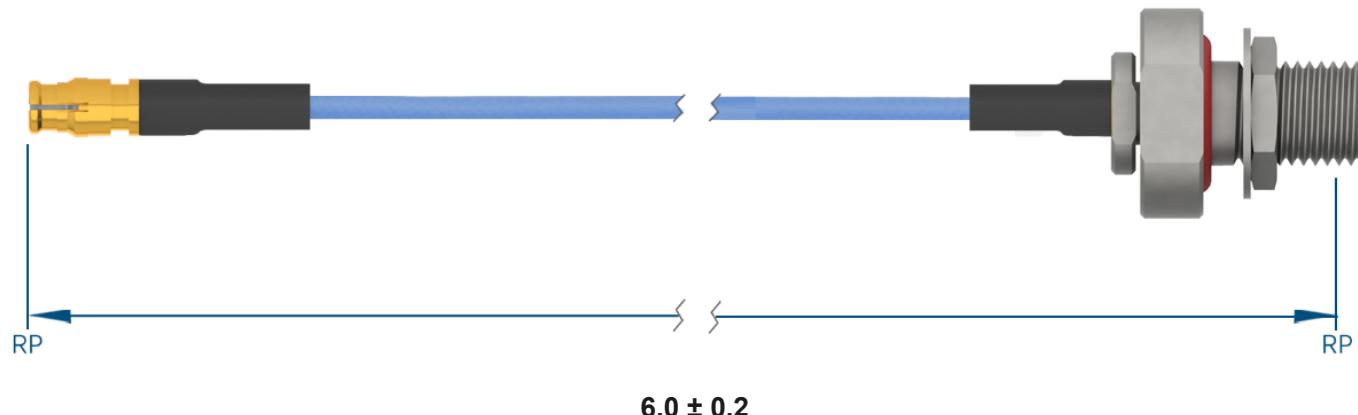

## MATERIAL

CONNECTORS: SMP Straight Female ([1221-4010](#))  
2.92mm Bulkhead Female ([SF1521-60045](#))  
CABLE: Ø.047 Flexible Coax  
SHRINK TUBING: M23053/5

## PERFORMANCE

IMPEDANCE: 50 Ohms  
FREQ. RANGE: DC to 40 GHz  
VSWR: 1.4:1 Max, DC to 18.0 GHz  
1.6:1 Max, 18.0 + GHz  
INSERTION LOSS: 1.89 dB Max

## NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches

**SV** Amphenol  
**MICROWAVE**

TITLE:  
SMP Straight Female to 2.92mm Bulkhead Female 6"  
Cable Assembly for Ø.047 Flexible Coax

DWG. NO.  
[FSSMP-047-FB292-060](#)

DRAWN  
2022-10-19 16:08:45