


## PRODUCT DATA DRAWING

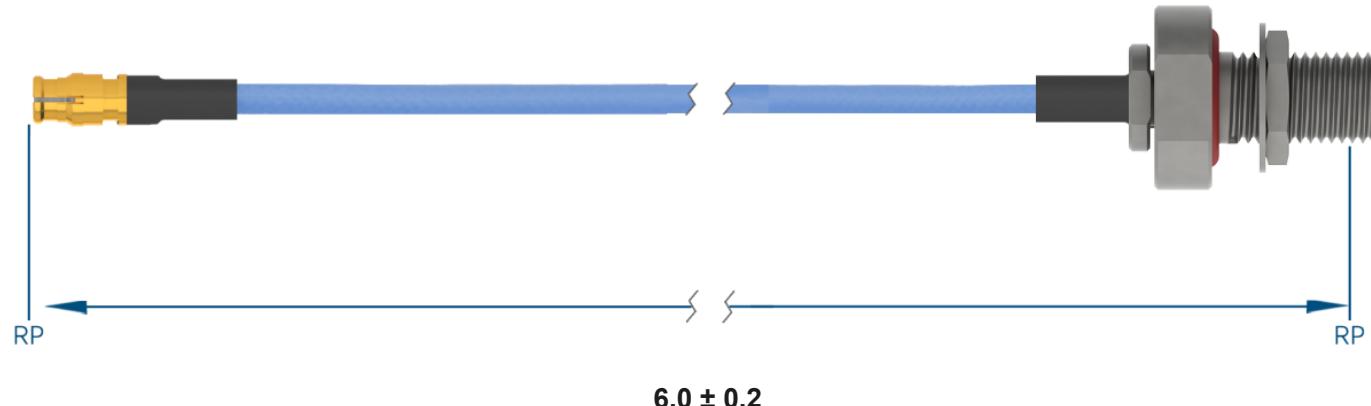

## MATERIAL

CONNECTORS: SMP Straight Female ([1221-4009](#))  
SMA Bulkhead Female ([2946-6012](#))  
CABLE: Ø.085 Flexible Coax  
SHRINK TUBING: M23053/5

## PERFORMANCE

IMPEDANCE: 50 Ohms  
FREQ. RANGE: DC to 18 GHz  
VSWR: 1.4:1 Max, DC to 18.0 GHz  
1.6:1 Max, 18.0 + GHz  
INSERTION LOSS: 0.82 dB Max

## NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

SMP Straight Female to SMA Bulkhead Female 6"  
Cable Assembly for Ø.085 Flexible Coax

## DWG. NO.

FSSMP-085-FBSMA-060

## DRAWN

2022-10-26 11:42:00