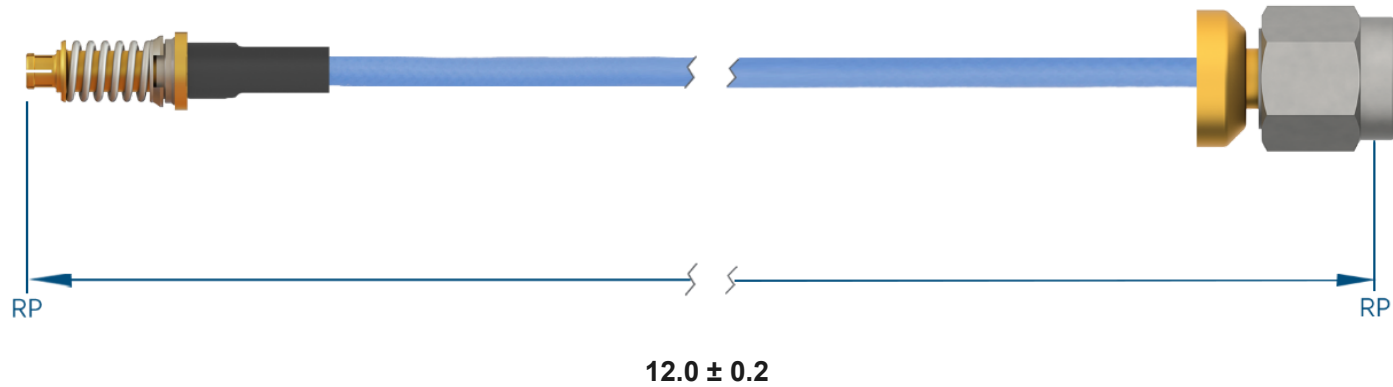


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: VITA 67.1/2 SMPM Plug-in Contact ([3221-40022](#))
SMA Low Profile Male ([2911-61000](#))

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 18 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 1.30 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches

**TITLE:**

VITA 67.1/2 SMPM Plug-in Contact to SMA Low Profile
Male 12" Cable Assembly for Ø.085 Flexible Coax

DWG. NO.

FV67SMPM-085-MSLPSMA-120

DRAWN

2022-10-18 15:07:18