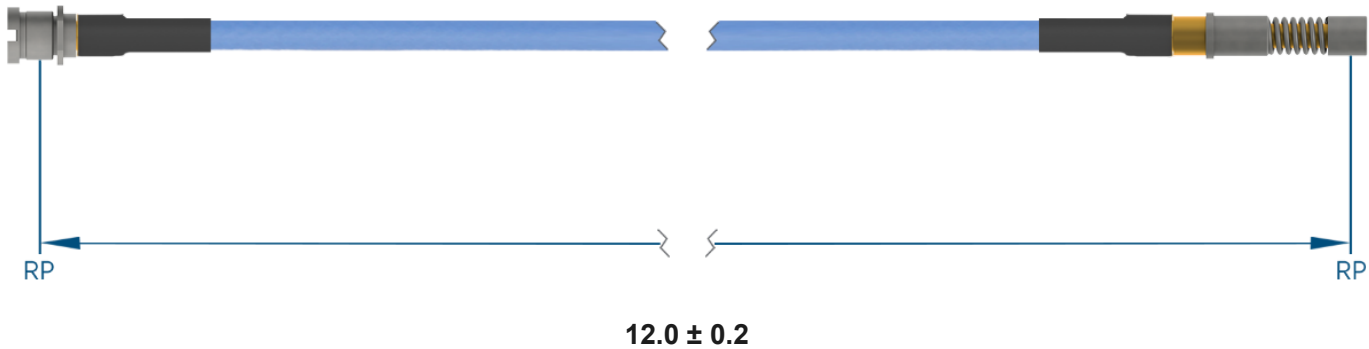


## PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMP Male Bulkhead (SF1211-6061)  
 SMPM Size 12 Socket (SF3211-6004)

CABLE: Ø.085 Flexible Coax

SHRINK TUBING: M23053/5

**PERFORMANCE**

IMPEDANCE: 50 Ohms

FREQ. RANGE: DC to 26.5 GHz

VSWR: 1.3:1 Max, DC to 18.0 GHz  
 1.5:1 Max, 18.0 + GHz

INSERTION LOSS: 1.61 dB Max

**NOTES**

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



## TITLE:

SMP Male Bulkhead to SMPM Size 12 Socket 12"  
 Cable Assembly for Ø.085 Flexible Coax

## DWG. NO.

MBSMP-085-S12DSMPM-120

## DRAWN

2022-10-18 14:50:29