


PRODUCT DATA DRAWING

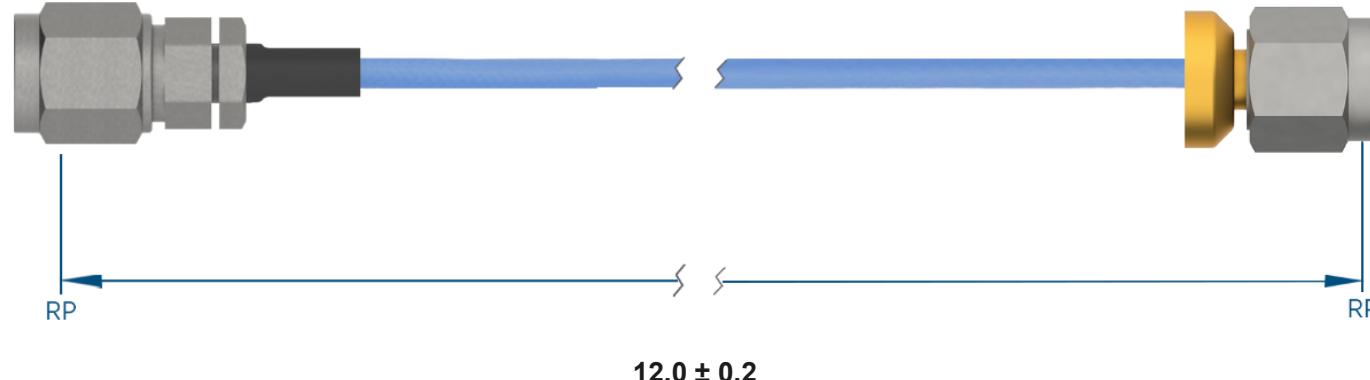

MATERIAL

CONNECTORS: 1.85mm Straight Male ([SF3311-60003](#))
SMA Low Profile Male ([2911-61000](#))
CABLE: Ø.085 Flexible Coax
SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms
FREQ. RANGE: DC to 18 GHz
VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz
INSERTION LOSS: 1.30 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches

SV Amphenol
MICROWAVE

TITLE:
1.85mm Straight Male to SMA Low Profile Male 12"
Cable Assembly for Ø.085 Flexible Coax

DWG. NO.
MS185-085-MSLPSMA-120

DRAWN
2022-10-18 11:19:04