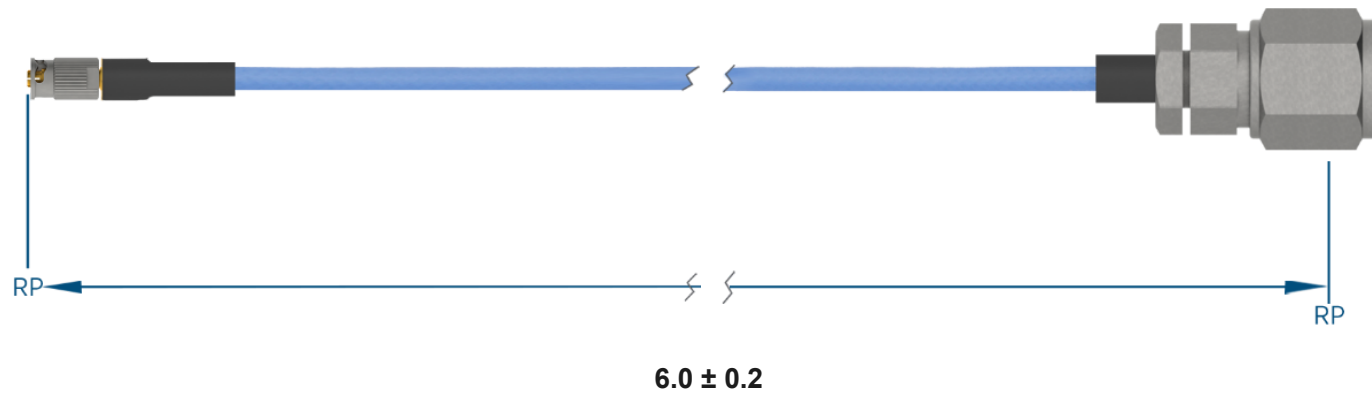


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMPM Female QB (3221-60003)
2.4mm Straight Male (SF1611-60001)
CABLE: Ø.047 Flexible Coax
SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms
FREQ. RANGE: DC to 50 GHz
VSWR: 1.4:1 Max, DC to 18.0 GHz
1.6:1 Max, 18.0 + GHz
INSERTION LOSS: 2.13 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches

**TITLE:**

SMPM Female QB to 2.4mm Straight Male 6" Cable
Assembly for Ø.047 Flexible Coax

DWG. NO.

FQSMPM-047-MS24-060

DRAWN

2022-10-17 16:13:04