


PRODUCT DATA DRAWING

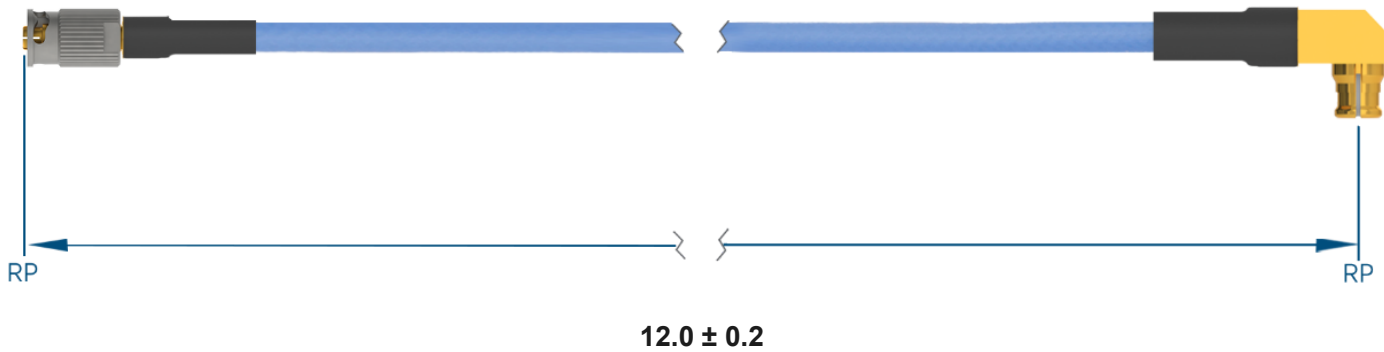

MATERIAL

- CONNECTORS: SMPM Female QB (3221-60004)
SMP R/A Female (1222-4005)
- CABLE: Ø.085 Flexible Coax
- SHRINK TUBING: M23053/5

PERFORMANCE

- IMPEDANCE: 50 Ohms
- FREQ. RANGE: DC to 40 GHz
- VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz
- INSERTION LOSS: 2.19 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMPM Female QB to SMP R/A Female 12" Cable
Assembly for Ø.085 Flexible Coax

DWG. NO.

FQSMPM-085-FRSMP-120

DRAWN

2022-10-18 11:21:05