


PRODUCT DATA DRAWING

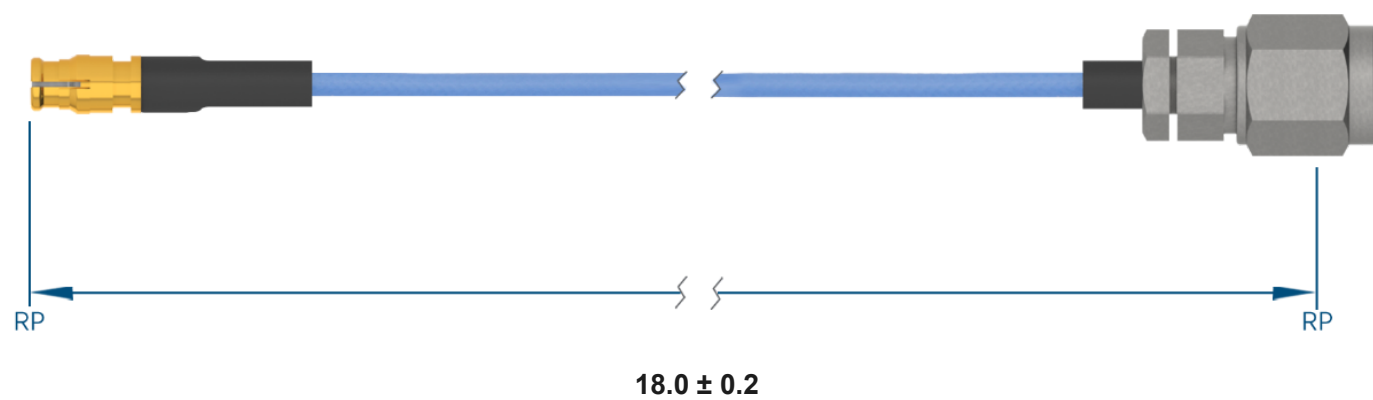

MATERIAL

- CONNECTORS: SMP Straight Female (1221-4010)
1.85mm Straight Male (SF3311-60002)
- CABLE: Ø.047 Flexible Coax
- SHRINK TUBING: M23053/5

PERFORMANCE

- IMPEDANCE: 50 Ohms
- FREQ. RANGE: DC to 40 GHz
- VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz
- INSERTION LOSS: 4.65 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMP Straight Female to 1.85mm Straight Male 18"
Cable Assembly for Ø.047 Flexible Coax

DWG. NO.

FSSMP-047-MS185-180

DRAWN

2022-10-26 11:25:46