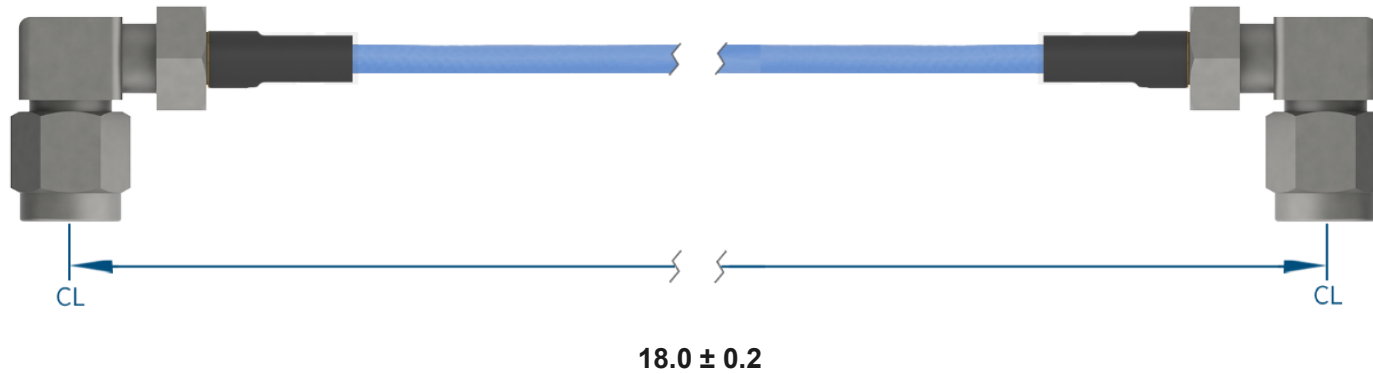


PRODUCT DATA DRAWING

**MATERIAL**

CONNECTORS: SMA R/A Male (2912-61001)
SMA R/A Male (2912-61001)
CABLE: Ø.085 Flexible Coax
SHRINK TUBING: M23053/5

PERFORMANCE

IMPEDANCE: 50 Ohms
FREQ. RANGE: DC to 18 GHz
VSWR: 1.3:1 Max, DC to 18.0 GHz
1.5:1 Max, 18.0 + GHz
INSERTION LOSS: 1.78 dB Max

NOTES

1. See individual data drawings for connector specifications
2. Dimensions shown are in inches



TITLE:

SMA R/A Male to SMA R/A Male 18" Cable Assembly
for Ø.085 Flexible Coax

DWG. NO.

MRSMA-085-MRSMA-180

DRAWN

2022-10-18 13:13:42